

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 858 399 B1**

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
06.06.2001 Bulletin 2001/23

(21) Application number: **96935074.3**

(22) Date of filing: **24.10.1996**

(51) Int Cl.7: **B41M 3/00, B41M 1/18**

(86) International application number:
PCT/GB96/02600

(87) International publication number:
WO 97/15453 (01.05.1997 Gazette 1997/19)

(54) PARTIAL PRINTING OF A SUBSTRATE

VERFAHREN ZUM PARTIELLEN BEDRUCKEN EINES SUBSTRATS

IMPRESSION PARTIELLE D'UN SUBSTRAT

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE**

(30) Priority: **24.10.1995 GB 9521797**

(43) Date of publication of application:
19.08.1998 Bulletin 1998/34

(73) Proprietor: **CONTRA VISION LIMITED**
Bramhall, Stockport, Cheshire SK7 2DU (GB)

(72) Inventor: **HILL, George, Roland**
Cheshire SK7 1HE (GB)

(74) Representative: **Hill, Richard et al**
Wilson, Gunn, M'Caw,
Cross Street
41-51 Royal Exchange
Manchester M2 7BD (GB)

(56) References cited:
FR-A- 2 221 920 **US-A- 1 928 758**
US-A- 4 673 609

- **PATENT ABSTRACTS OF JAPAN vol. 012, no. 294 (M-730), 11 August 1988 & JP 63 071385 A (DAINIPPON PRINTING CO LTD), 31 March 1988,**
- **PATENT ABSTRACTS OF JAPAN vol. 012, no. 149 (M-694), 10 May 1988 & JP 62 270377 A (TOPPAN PRINTING CO LTD), 24 November 1987,**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 858 399 B1

Description

[0001] This invention relates to the partial printing of a substrate with a plurality of layers, at least one layer being applied to the substrate with inexact registration in relation to another layer.

[0002] There are a number of visual and other functional benefits in printing only part of the surface area of a substrate. For example, it is common to partially print a substrate with one or more colours to reveal the substrate exposed to form part of the required design. Such methods may also be used in the printing of printed circuits, membrane switches and backlit display panels in which superimposed layers must be in exact registration or one layer must overlap another layer, for example to achieve an insulating layer over a conductive layer of ink.

[0003] White is the most common colour of substrate to be printed over part of its area and revealed in other parts, firstly because it is easiest to achieve the desired perceived colour of other colours if they are printed on white, especially if such colours are formed by transparent or translucent inks. Secondly, white forms a good contrast to many other colours and enables easily visible graphic designs. Thirdly, white commonly forms a significantly high percentage of many designs. Fourthly, the mass processing of white substrates provides economy and efficiency in production, by standardisation of the base colour, if not the material specification. Fifthly, white forms the normal background to four colour process printing, in which four colours (black, cyan, magenta and yellow) are typically printed in "half tone" dot patterns onto a white background, the size of the dots of each colour being typically printed in varying size according to "colour separations" to be replicated or by digital printing techniques utilising Raster Image Processing (RIP). From above a minimum distance, the eye cannot resolve the individual coloured dots but the coloured dots merge to give a combined perceived colour at any position on the printed product.

[0004] Conventional printing processes all suffer inexact registration, owing to

- i) printing machine error or "tolerance" in delivering ink or other marking material,
- ii) the dimensional instability of a liquid ink or other marking material in liquid state on a substrate,
- iii) the dimensional instability of a substrate through temperature and humidity changes between printing "passes" (printing of individual layers), and
- iv) the error or "tolerance" in delivery of a substrate into the printing position.

[0005] For many products, this lack of registration, or lack of being able to print ink on a substrate exactly where intended, is not important. However, there are a number of products which can be adversely affected by such lack of registration, one example being unidirectional or other vision control products, such as those disclosed in British Patent No. 2165292, which includes methods of printing with substantially exact registration and methods of overcoming the limitations of registration error of conventional printing methods. Such products typically comprise the partial printing of a transparent substrate with a fine pattern in the form of dots or lines with surrounding or intermediate transparent areas or of a grid pattern surrounding transparent areas.

[0006] A cross-section taken through such partially printed substrates will be in the form of a continuous substrate material on which are superimposed alternate printed portions and unprinted portions. When the cross-sectional dimensions of the printed portions of such a printed product are small and it is desired to superimpose more than one layer on such printed portions, the registration error of conventional printing processes can severely prejudice the achievement of the desired visual or other performance criteria. The critical factor is the registration error or tolerance of the printing process compared to the cross-sectional dimensions of the printed portions.

[0007] In the case of conventional four colour process printing (sometimes referred to as four colour half-tone printing) or digital four colour process printing, the size of the individual dots of colour are very small in relation to the background substrate, which is typically white and made of paper, card or plastic materials. Substantial lack of registration in the printing of individual dots is normally acceptable as the individual dots of one colour are not perceived as individual dots, but are combined with differently coloured dots to provide the required overall impression. Lack of registration between the dots of various colours is only generally perceived as a lack of sharpness of design boundaries within the design, such as the edges of insignia seen against a background colour. The observer sees what is printed. Only if the observer knows that the desired degree of edge clarity is different to that observed, or if the lack of registration is such that colour "halos" are seen at colour boundaries, is the lack of registration recognisable.

[0008] However, if the requirement is to print a relatively fine pattern of background colour, such as white dots, then superimpose one or more other uniform colours or four colour process colours on some or all of these dots, the lack of registration of the printing process can have a significantly deleterious effect on the functional performance compared to that intended. For example, the perceived colours of an image or design will vary over the area of the substrate from the desired colours owing to the visual interaction of the unregistered layers. If a pattern of 1 mm sided square white dots are intended to be covered with 1 mm sided square dots of a different colour, but there is a registration error of 0.2 mm in two orthogonal directions on plan, as in Fig. 1 of the accompanying drawings, then 36% of the desired area will appear white and have a corresponding effect of 0.36 mm² white on the overall printed area of 1.36

mm². If the substrate is black and the different colour is formed by transparent ink, the different colour will be substantially invisible against the black substrate and the 0.36 mm² of white will be seen in combination with the 0.64 mm² area of the different colour, which will appear consequently "whitened" in this area. Such alteration from the desired perceived colour will be most noticeable compared to other individual squares making up the pattern where the error in registration differs and compared to any squares in which the different colour substantially covers the white. If the different colour was intended to appear uniform over an area of panel, it will instead appear to be shaded.

[0009] If the substrate is transparent, such lack of registration will be typically visible from the other side of the substrate as well, the overlapping different colour in the above example being visible as well as the white square. There is another problem that undesirable perception of colour can be caused by lack of opacity of individual ink layers. In the above example, if the white and different colour were printed on a transparent substrate, when the white is observed from the other side of the substrate, this could be modified by the different colour, which could be exacerbated by the illumination condition behind the substrate.

[0010] From the printed side of the panel, the different colour covering the white area would be perceived as being a whitened or a lighter colour tone of the different colour. It is common in printing to overcome such lack of opacity by printing more than one layer of a colour, to achieve the desired or necessary degree of opacity. However, if the registration error is relatively large compared to the cross-sectional dimensions of the printed portions being printed, the lack of registration will result in yet further areas of different perceived colour where the edges of the desired shape overlap through lack of registration.

[0011] The purpose of this invention is to overcome the above-mentioned problems in the partial printing of a substrate with printed portions of relatively small cross-sectional dimensions, typically less than 1 centimetre width, and commonly less than 1 millimetre width, in which the registration error between at least two printed layers intended to be partially or totally superimposed would otherwise affect the desired product's functional performance, such as the perceived image of the printed product.

[0012] According to the invention there is provided a panel comprising a substantially imperforate substrate (as defined herein) with a print pattern (as defined herein) adhered to said substrate, and wherein said print pattern comprises a first layer and a second layer (as defined herein) and wherein a particular cross-section taken through said panel comprises said substrate having two outer edges and said print pattern having alternate printed portions and unprinted portions, and wherein every printed portion has two outer edges, and wherein within said particular cross-section said second layer

has two outer boundaries, and each of said printed portions between said two outer boundaries are constructed and arranged such that they include a part of said first layer and a part of said second layer and they include two outer edges of said part of said first layer and two outer edges of said part of said second layer, and wherein said two outer edges of said part of said second layer are within said two outer edges of said part of said first layer, and wherein the average cross-sectional printed portion width (as defined herein) is less than one centimetre, and said panel is made by a method comprising: printing said second layer within said each of said printed portions between said two outer boundaries of said second layer by applying at least a part of a presented width (as defined herein) of said second layer within said each of said printed portions and said presented width of said second layer only adheres within said each of said printed portions, and within at least one of said printed portions having both said two outer edges within and spaced from said two outer edges of said substrate, said presented width of said part of said second layer differs from the width of said at least one of said printed portions by at least 10% of the width of said part of said second layer.

[0013] The invention also provides a panel comprising a substantially imperforate substrate (as defined herein) with a print pattern (as defined herein) adhered to said substrate, and wherein said print pattern comprises a first layer and a second layer (as defined herein) and wherein a particular cross-section taken through said panel comprises said substrate having two outer edges and said print pattern having alternate printed portions and unprinted portions, and wherein every printed portion has two outer edges, and wherein within said particular cross-section said second layer has two outer boundaries, and each of said printed portions between said two outer boundaries are constructed and arranged such that they include a part of said first layer and a part of said second layer and they include two outer edges of said part of said first layer and two outer edges of said part of said second layer, and wherein said two outer edges of said part of said second layer are within said two outer edges of said part of said first layer, and wherein the average cross-sectional printed portion width (as defined herein) is less than one centimetre, and within at least one of said printed portions having both said two outer edges within and spaced from said two outer edges of said substrate, the width between said two outer edges of said part of said second layer differs from the width of said at least one of said printed portions by at least 10% of the width of said part of said second layer.

[0014] A "substrate" may be a single sheet of homogeneous material or a multi-layer material or assembly, for example incorporating the overall application of a printed ink layer. Typically, the substrate is substantially imperforate, except for any holes that may be used to assist printing registration or to feed the substrate

through a printing or other machine.

[0015] In all embodiments of the invention, only part of the substrate is printed, termed the "print pattern". The "print pattern" is typically a pattern of dots, lines or other plurality of discrete elements and/or a grid pattern surrounding a plurality of unprinted areas.

[0016] In all embodiments it is possible to take a particular cross-section through a panel of the invention comprising the substrate having two outer edges and the print pattern having alternate printed portions and unprinted portions, each printed portion having two outer edges. At least one and typically all the printed portions comprise a first layer of one material, for example a printed ink. A second layer of printed material typically overlies or underlies the first layer within every printed portion within the boundaries of the second layer.

[0017] The term "second layer" means a layer of a single material, such as a single colour ink, or a four colour printing process layer, in which the individual colour deposits, normally black, cyan, magenta and yellow, are typically discontinuous within a printed portion. Within a particular cross-section, the second layer has two outer boundaries and within the two outer boundaries each printed portion is constructed to have the two outer edges of a part of the second layer lying within the two outer edges of a part of the first layer, which includes the possibilities of one outer edge of the second layer being coterminous with an outer edge of the first layer or the outer edges of both layers being coterminous.

[0018] The width of a printed portion or the part of a layer within a printed portion is the dimension between its two outer edges. In a particular cross-section through a panel, the "average cross-sectional printed portion width" is the sum of the widths of every printed portion within the particular cross-section divided by the total number of printed portions within the particular cross-section.

[0019] A "presented width of the second layer" is the width of the second layer presented over a single printed portion in a printing process. It may be the actual width of printed second layer material deposited or a larger width. For example, a presented width of the second layer may include portions which are presented to the substrate outside the outer edges of a printed portion but which are not adhered to the substrate outside the outer edges of the printed portion. If a second layer is presented continuously over printed and unprinted portions, the presented width of the second layer for a single printed portion is deemed to be the width between the mid-points of the two adjacent unprinted portions.

[0020] The difference between the presented width of the second layer and the width of the printed portion to which it is presented represents the registration tolerance the invention enables while producing the desired product. The term "presented" includes the physical application of a layer of printing ink, foil, toner or transfer material to the substrate or a previously applied layer, or such materials may be presented in a spaced rela-

tionship from the substrate, for example to be attracted by electrostatic charge within the printed portions of the substrate or of a previously applied layer.

[0021] The invention provides for the management or elimination of registration error in a printed product, registration error that would otherwise cause deficiencies in the printed product. Whilst it is possible to reduce the problems of registration error by pre-printing a design on a transfer medium and selectively transferring this to the required print portions, the invention enables the control of direct printing of a substrate. "Direct printing" in this context means the application of individual colours, such as a single 'spot' colour, to be perceived as the single colour in a design, or the individual black, cyan, magenta or yellow colours of a four colour printing process, delivered from their individual sources, such as ink or toner reservoirs or a thermal transfer foil cartridge, rather than a pre-printed four colour process design on a transfer medium.

[0022] In one embodiment of the invention within some or all printed portions, a second layer extends beyond the perimeter of a first layer. Typically, a transparent or translucent second layer completely covers and extends beyond the perimeter of a white first layer. A dark background is provided under the first colour layer by means of a dark substrate or a dark colour third layer deposited on the substrate within one or more printed portions. For example, the print pattern is printed on a substrate in black and then a white first layer is printed within and spaced inside the black layer. The discrete or interconnected white areas are overprinted with the desired design colour or colours using transparent or translucent ink, which overlaps the white but stays within the black areas. The combination of the printed second colour layer and the printed white first layer produces the desired perceived colour. This result is achieved because, on each printed portion, the transparent or translucent design colour ink is not readily visible against the black background but combines with the white first layer to produce the desired perceived colour. This embodiment is referred to as the "Through Combination".

[0023] In order to ensure that the transparent or translucent second colour layer extends beyond the white first layer but lies within the third black layer, on each printed portion, the black layer width should be wider than the white layer width by an amount of at least eight times the printing tolerance (8T) and the second colour layer should typically be wider than the white layer by an amount of four times the printing tolerance (4T). Typically, the nominal edge gap between the black and second colour layers should be two times the printing tolerance (2T) and the nominal edge gap between the second colour layer and the white layer should also be two times the printing tolerance (2T). The printing tolerance T is the maximum registration error that should result using a particular printing process, substrate and ink. Such an arrangement enables any edge of the transparent or translucent second colour layer to stay within the

exposed area of the black layer, whatever the direction and amount of actual error in any of the three layers within any printed portion.

[0024] In another embodiment, referred to herein as the "Lateral Combination" the second layer is deposited within the area defined by the first layer and has a smaller area than that of the first colour layer. Typically, on each printed portion, a second colour layer is printed within a white first layer. The printed portions are sufficiently small and the relative sizes of the exposed areas of the first and second colours are such that the eye and brain combine the two colours together to give the desired perceived colour.

[0025] For example, in order to print panels of the type described in GB 2165292, a print pattern can be printed in white and design colour ink or inks are printed to fall wholly within the white print pattern. The design colour ink is selected such that the exposed white and design colours combine to provide the required perceived design colour or colours, the design colours being printed darker than the intended perceived colour, to compensate for the whitening effect of the area of white, resulting in a perceived colour of a lighter "grey tone". The area of white to be exposed would normally be minimised and depend on the shape of the dot, line or grid pattern and the tolerance in registration which can confidently be achieved by the selected printing method, equipment and inks. The less the error in registration that can be reliably achieved, the larger the area of colour that can be printed to reliably fall within the area of white. Typically, the cross-sectional width of the design colour layer within a printed portion would be less than the white first layer width by an amount of at least four times the printing tolerance (4T) with a nominal edge gap of two times the printing tolerance (2T) between the edges of the design colour layer and the white background colour layer. Such an arrangement enables the white background colour layer to shift out of registration by the given tolerance in one direction and a second design colour layer to shift by the given tolerance in the opposite direction without overlapping the background colour layer.

[0026] In another embodiment of the invention, the second layer is presented to the substrate over an area extending beyond the first layer of one or more printed portions but only adheres to the first layer within the printed portions and does not adhere at all to the substrate between the printed portions. Typically, the second layer is a second design colour layer and is presented over the whole surface of the substrate within the desired outer boundaries of the second design colour layer. It is intended to be seen against a white layer, which may be the first layer or the white layer may be a third layer within a first black layer. The second design colour layer adheres to the first layer but is typically immediately removed from the unprinted portions in the same operation. If the second design colour layer is opaque, then its colour is perceived independently over the first

colour layer to which it is applied. If the second design colour layer is transparent or translucent, it is perceived as a Through Combination, typically with a white layer.

[0027] Within any printed portion, the second layer is substantially exactly registered over the first layer. Means of achieving exactly or substantially exactly registered superimposed layers are disclosed in GB 2118096, 2165292 and GB 2188873. However, the present invention distinguishes from those methods in ways that are advantageous, by enabling the use of existing printing methods and eliminating additional steps to achieve substantially exact registration, such as the removal of cured marking material. This embodiment is referred to as the "Improved Exact Registration".

[0028] In another embodiment, the invention may be used to print a pattern of dots, lines or a grid pattern on a transparent substrate to manufacture a product of similar performance characteristics to those in British Patent No. 2165292. In such products, there is a "silhouette pattern" of opaque material "which subdivides a panel into a plurality of opaque areas and/or transparent or translucent areas". Within the silhouette pattern, there is typically a number of superimposed ink layers to provide a design that is visible from one side of the panel which is not visible from the other side of the panel. British Patent No. 2165292 describes a number of methods of production which can achieve this effect, some providing exact or substantially exact registration of superimposed ink layers. In one method described as the Overlap Method and illustrated in Fig. 18 of Patent No. 2165292 one layer of ink overlaps a design colour ink layer and thus obscures it from the other side of the panel.

[0029] The present invention provides an improvement to that method enabling the desired design colour rendering to be achieved in spite of the registration limitations of conventional printing processes. In a typical panel, a silhouette pattern of black ink is superimposed by a background colour layer, typically white ink of lesser cross-sectional dimension than the black ink, in order for the white ink not to be visible from the other side of the black ink and, therefore, the other side of the panel. One or more design colour layers are then superimposed over the white layer, in order to provide the desired design, typically ensuring that the design colour layers do not overlap the black background layer, so as not to be visible from the other side of the panel.

[0030] By means of the present invention, using the Through Combination embodiment, transparent or translucent design colour inks are arranged to extend beyond and completely cover the white background layer. Those parts of the transparent or translucent colour which extend beyond the white background layer are not readily visible against the black background layer. Alternatively, according to the Lateral Combination embodiment, the design colour inks should be arranged to be applied only within the white background colour layer in order to achieve the required perceived design colour

or colours.

[0031] In another alternative, according to the Improved Exact Registration embodiment, the design colour inks are presented beyond a first layer of white or beyond a layer of black within which there is a layer of white, providing the desired colour perception over the area of white.

[0032] In the Through Combination or Improved Exact Registration embodiments, the desired colour or colours are seen in combination with an underlying white layer. With the Lateral Combination embodiment, the selection of a second layer design colour to achieve the required final effect depends upon the type of ink and the respective perceived colours of the cured second layer design colour ink and the background white ink and their respective proportions. The subject of colour theory is complex including the means of predicting the effects of colour mixing and the perception of coloured areas. Colour properties of hue, luminosity, saturation, intensity, tonality and purity are affected and may be modified by underlying and surrounding or adjacent colours. Whilst it is relatively easy to predict and control the effects of achromatic colours (white, black and greys) on other colours, no simple formula can be provided. The properties of particular white pigments and ink formulations vary and the prediction of a change in grey tone should ideally be undertaken using analytical equipment such as a spectrophotometer to analyse the individual white and second layer colours, in order to predict the perceived colour of the combination. The grey tone is a term of art used in colour systems to describe perceived lightness or darkness of a particular colour, which may vary from virtually white (near zero % grey tone) to virtually black (near 100% grey tone), across a chromatic chiaroscuro scale.

[0033] The scale of grey tones from white to black is a continuous gradation. It is known that the trained eye can distinguish at least two hundred grey tones across an achromatic chiaroscuro scale. Common colour matching systems identify relatively crude grey tone gradations. For example, the Pantone Matching Systems® identifies greys expressed as a percentage of black in a black and white mixture of 1.5%, 3%, 6.2%, 12.5%, 25% and 50%. The difference between the greys with 1.5% black and 3% black is clearly visible to any sighted person. Typical registration error in normal printing methods can easily cause variations of grey tone, from a desired value, of 10%, 20%, 30% and more in the partial printing of a substrate. For most printing methods a plus or minus registration tolerance of 0.1 mm is regarded as extremely good. However, the printing of a pattern of 1 mm wide lines of a colour layer over a white layer on a black background could cause a width of 0.8 mm colour with a 0.2 mm white overlap with a registration error of 0.1 mm in each layer, in opposite directions. In this example, a layer of design colour ink that covers 80% of the background white colour ink might be whitened or lightened in grey tone by say 25%.

With the Lateral Combination embodiment, a difference of 10% between the presented width of a second layer and the width of a printed portion allows for a tolerance (T) of plus or minus 0.1 mm for a 4 mm printed portion width ($4T = 0.4 \text{ mm} = 10\% \text{ of } 4 \text{ mm}$). A 20% difference allows a tolerance of plus or minus 0.1 mm for a 2 mm printed portion width, etc. Such registration errors without the features of this invention would typically incur clearly visible undesirable variation in the grey tone of a colour within its outer boundaries. The features of this invention substantially eliminate variation from a desired perceived colour owing to registration error.

[0034] The invention allows for a plurality of layers of any colour to be applied within the stated dimensional tolerances, to achieve a satisfactory product. For example, using litho printing, which typically uses transparent inks, it may be necessary to apply 4 to 6 layers of black to achieve an opaque black layer. Similarly, it may be necessary to print between 4 and 10 layers of ink in order to achieve a white colour of sufficient opacity to form the base for transparent design colours. The layers may be required to all be white or one or more of the layers may be silver, a common method of attempting to achieve a white opaque effect. Also well known, a percentage of blue ink may be mixed with the white ink in one or more of the layers, which provides the optical illusion of increasing the whiteness or brightness of the white. According to the dimensional disciplines of the invention, none of the white layers will overlap any of the black layers. For the Through Combination embodiment, all of the design colour layers will overlap and cover the whole of every white colour layer that is not intended to be seen in the finished product. In the Lateral Combination embodiment, every design colour layer would fall within a white background colour layer. For such multiple layer colour deposits, the actual printing registration error will vary from printing pass to printing pass. If such error was random, this would follow a "normal distribution curve" of displacement from the desired nominal position on the substrate or from a previous colour deposit.

[0035] In most methods of printing, a reliably achievable printing tolerance is not the same in every direction, typically relating to the direction of "pull" of a squeegee blade in screen printing or the direction of substrate travel in printing systems involving a rotating cylinder, such as offset litho printing. The registration error and, therefore, tolerance to be adopted is generally greater in the direction of movement in the application of ink than perpendicular to this. A refinement of the invention, therefore, would allow for a greater tolerance (TL) in one direction, typically being the direction of ink application and a lesser tolerance (TG) in the direction perpendicular to the one direction. The cross-sectional dimensions of the individual layers would then be determined by using either TL or TG or a combined tolerance at any intermediate angle, which may be calculated vectorially. In certain printing methods, the tolerance also varies ac-

according to other factors, for example in screen printing the tolerance is typically different at the outside ends of a squeegee than the centre, owing to the geometrical distortion of the screen when squeegee pressure is applied, depending principally upon the gap between the end of the squeegee and the screen printing frame, the "snap-off" gap between the screen and the substrate, and the type and tension of the screen mesh.

[0036] It is also well known that with litho printing, in which one edge of a substrate is gripped by "grippers", that the lateral tolerance parallel to the grippers or leading edge of the substrate increases with the distance from the leading edge, such that if a pattern of parallel lines is printed perpendicular to the leading edge, these lines tend to "fan out" from the leading edge. However, it is the relative tolerance of different applications of ink that is generally more important in relation to the invention than the absolute tolerance in relation to the substrate. The tolerance requirements to practise the invention can easily be established from printing manufacturers' guidelines and/or experimentation. Ultimately, the achievement of the desired performance characteristics will prove the tolerances required in the design and production of artwork, screen printing screens, offset litho plates, etc.

[0037] In order to minimise the effect of printing tolerances in the manufacture of such products, it is generally preferable to have a print pattern of lines oriented in the direction of movement of the application of ink, for example perpendicular to the squeegee in screen printing or the "gripper" leading edge in offset litho printing.

[0038] Panels of the invention according to the Through Combination and Lateral Combination embodiments can be manufactured by virtually any printing process, including traditional processes such as screen-printing, offset litho printing and gravure printing. They may also utilise any of the digital printing methods, including those grouped under the categories of Electrographic, Thermal Transfer and Ink Jet printing.

[0039] All these digital methods typically use a Raster Image Processor for enabling the positioning and size of deposits of black, cyan, magenta and yellow material in a four colour process and/or additional 'spot' colours.

[0040] Panels of the invention according to the Improved Exact Registration embodiment utilise methods of printing that enable the second layer to adhere within the printed portions but not adhere within the unprinted portions, to which the ink, foil, toner or other marking material is presented but not adhered. Such methods include

1. Thermal Transfer Differential Adhesion Method. This method uses conventional thermal foil transfer equipment, such as the Gerber Edge®, a registered trade mark of Gerber Scientific Products, Inc., USA. Such machines typically utilise a cartridge of foil comprising a polyester support and a pigmented resin layer, which is passed through a transfer head

comprising thousands of mini heat presses, which are activated by computer control utilising a Raster Image Processor, to melt and bond deposits of the pigmented resin layer to a pvc substrate, four passes being required using black, cyan, magenta and yellow foils to build up a four colour process image. 'Spot' colours, including metallic foils, are also commonly used. This Improved Exact Registration method requires the print pattern to be determined using a material that is receptive to such thermal transfer on a substrate that is not very receptive to thermal transfer. In one example, a print pattern is applied in one or more layers of pvc ink of relatively high plasticity, such as a typical pvc ink used for vehicle livery, preferably a gloss ink to provide a relatively smooth macro surface topography, preferably white.

Alternatively, a clear highly plasticised pvc lacquer or other material with a relatively smooth and high energy surface can overlie a white layer. This print pattern is applied to conventional print treated polyester film.

When processed in a thermal transfer machine as for pvc substrate, the pigmented resin layer adheres to the print pattern but not to the substrate. Alternatively, a conventional pvc substrate can be treated to have relatively low surface energy outside the print pattern, for example by applying a silicone based material outside the area of the print pattern. Transfer would then take place within the exposed area of pvc substrate but not the pretreated area.

2. Electrographic Differential Adhesion Method. Electrographic processes such as Scotchprint™, a trade mark of the Minnesota Mining and Manufacturing Company, USA, typically involve the electrographic printing of an image on a transfer medium such as "Wearcoat" transfer medium manufactured by REXAM, Inc., USA. This transfer medium is then passed through rollers with a substrate, such as pvc film, under heat and pressure, which transfers the image from the carrier.

Using similar substrate and ink materials as outlined in Method 1, it is possible to selectively transfer the preprinted image to a print pattern but not to the substrate.

3. Ink Jet Differential Adhesion Method.

This method requires an ink receptive print pattern and an ink repellent substrate. Ink jet inks are conventionally water based and will not adhere to conventional pvc, polyester or other such substrates without pretreatment. Substrates such as polyester or polyester treated to receive pvc inks are hydrophobic, rejecting normal water based materials. Inks suited to printing paper or card are typically hydrophilic, receptive to water based inks

which adhere and dry on them. one such ink is Hydropoint 2200 Series manufactured by Coates Lorilleux Screen Ltd.

A print pattern is printed incorporating a top layer of white hydrophilic ink. This enables an ink jet printer to emit ink for an overall four colour image but the ink only adheres to the print pattern. The 'free' ink on the areas to be unprinted, which does not adhere, can be absorbed into an underlying hydrophilic layer, typically a layer of black ink lying outside the white ink, to avoid contamination of the white layer by absorbed second layer design colour ink. Alternatively, any remnants of ink outside the print pattern can be removed by an air knife, cleaning roller, be wiped off, be washed off or removed by other means.

4. Electrostatic Chargeable Print Pattern Method.

A substrate is printed with a print pattern that includes a layer of chargeable material, that is charged with an electrostatic latent image, onto which electrostatically charged toner is attracted but is not attracted to the surrounding substrate.

The electrostatic latent image is charged by an electronic writing stylus immediately before being fed through a toner fountain of conventional liquid toner which is either heat fusible or air dried after being attracted to the print pattern, or powder toner, which is fused by heat and/or pressure after being attracted to the print pattern.

The print pattern comprises a chargeable first layer, such as a paper based material or an insulating ink, common in the printing of printed circuits, keyboards, membrane switches, etc. Alternatively, the coating material used on electrostatically printed pvc film can be selectively coated to a pvc film, typically by screenprinting a pattern of lines.

Whilst it is possible to selectively charge a conventional substrate for electrostatic printing by means of suitable software, toner inks are typically transparent or translucent and it is advantageous for many products to have an opaque print pattern onto which the toner will be attracted, such as a white on black print pattern incorporating the chargeable layer.

5. Print Pattern Trip Method.

Digital Printing Machines, and those for Thermal Transfer and Ink Jet printing in particular, can be instructed to print on selected areas of the substrate forming the print pattern. As an example, a print pattern of lines of one or more layers can be printed on a transparent substrate by any method, ideally with opaque ink, typically having a white top layer or white layer overlain by a clear layer which is receptive to the particular marking material, such as foil transfer pigmented resin or ink jet inks.

[0041] The substrate is fed in the direction perpendicular to the print pattern lines and optical scanning devices, such as those used in printing machine registration devices, 'trip' where identifying the leading and trailing edges of the lines and instruct the ink jets or other marking material delivery device to deliver onto the opaque areas but not the transparent areas.

[0042] In any of the previously described methods, where an opaque white layer and/or an opaque black layer is required, onto which to superimpose design colours, it may be preferable to print such opaque background layers by screenprinting or other means of applying relatively thick layers of relatively opaque ink. These opaque layers can then be superimposed by transparent or translucent inks using another technique, such as a digital printing technique.

[0043] Specific embodiments of the invention will now be described by way of example with reference to the accompanying drawings in which:-

Fig. 1 is a section through a prior art partially printed substrate;

Fig. 1A is a plan view of the printed substrate of Fig. 1 in the direction of arrow A;

Fig. 1B is an under plan view of the substrate of Fig. 1 in the direction of arrow B;

Fig. 2 is a section through a Through Combination embodiment of the invention;

Fig. 2A is a plan view of the embodiment of Fig. 2 in the direction of arrow A;

Fig. 3 is a section through a Lateral Combination embodiment of the invention;

Fig. 3A is a plan view of the embodiment of Fig. 3 in the direction of arrow A;

Fig. 4 is a section through another embodiment of the Through Combination type;

Fig. 4A is a plan view of the embodiment of Fig. 4 in the direction of arrow A;

Fig. 5 is a section through another embodiment of the Lateral Combination type;

Fig. 5A is a plan view of the embodiment of Fig. 5 in the direction of arrow A;

Fig. 6 is a section through yet another embodiment of the Lateral Combination type;

Fig. 6A is a plan view of the embodiment of Fig. 6 in the direction of arrow A; and

Fig. 7 is a section through an embodiment similar to that of Fig. 6.

Figs. 8A through to 8D are sections through a printed substrate illustrating Lateral Combination embodiments.

Figs. 9A through to 9C are sections through a printed substrate illustrating Through Combination embodiments.

Figs. 10A through to 10C are sections through a printed substrate illustrating Improved Exact Registration embodiments.

Fig. 11 is a section through illustrating the Thermal Transfer Differential Adhesion Method 1 and the Thermographic Differential Adhesion Method 2.

Figs. 12 A and 12B are sections illustrating the Ink Jet Differential Adhesion Method 3.

Fig. 13 is a section illustrating the Electrostatic Chargeable Print Pattern Method 4.

[0044] Referring to Figs. 1, 1A and 1B, a substrate 1 is printed with a white colour 2. A second darker colour 3 is intended to be deposited over the same area as colour 2. However, as illustrated in the drawings the lack of exact registration means that in plan view part of the white colour 2 extends beyond part of the perimeter of the dark colour 3. The net effect of this lack of registration is that where the dark colour overlies the white colour, the dark colour will appear diluted in hue compared to the part of the dark colour that does not overlie the white colour. The problem is that in other parts of the print pattern the extent of lack of registration will inevitably be different so that overall there will be a distinct lack of uniformity in the appearance of the print pattern.

[0045] Referring now to Fig. 2 a dark, preferably black, opaque substrate 5, has a white colour 2 deposited thereon. The white colour is covered completely by a transparent or translucent colour 3, such that layer 3 extends beyond the edge of the white colour 2. When viewed in the direction of arrow A the eye perceives a combination of the white and colour layers 2 and 3 over the area of the white colour. The parts of colour 3 which extend beyond the white colour, being transparent appear to be substantially the colour of the substrate, i.e. black. It will be seen that the combination of the white and colour layers 2 and 3 will be the same over the entire print pattern irrespective of variations in registration of the colour 3 relative to the white layer 2.

[0046] In the embodiment of Fig. 3 a combination of colours is achieved by virtue of colour layer 3 being of smaller area than white layer 2 and being deposited completely within white layer 2. Variations in the position of layer 3 on layer 2 do not affect the relative areas of

white and colour that are exposed with the result that the overall appearance of the print pattern will be uniform.

[0047] The embodiment of Fig. 4 is similar to that of Fig. 2 except that the substrate 6 is transparent and a black or dark layer 4 is deposited under the white colour 2. To obtain the desired effect the area of layer 4 should be big enough always to extend to the limit of any possible position of the colour layer 3.

[0048] Fig. 5 shows an embodiment which is similar to that of Fig. 3, but with a transparent substrate 6 and a black or dark layer 4 under the white colour 2. The layer 4 should project beyond the perimeter of the white colour 2.

[0049] Fig. 6 illustrates the use of a plurality of layers to achieve a lateral combination embodiment similar to that of Fig. 5. As can be seen in the drawing three black layers 4 are deposited on substrate 6, but with inexact registration. Three white layers 2 are deposited on the black layers and then one colour layer 3 is deposited onto the white layers 2 with inexact registration. Although there may be some perceived blurring at the edges of the layers the overall effect across the print pattern will be substantially uniform.

[0050] Fig. 7 illustrates a section through multiple ink layers which follow a theoretical "normal distribution" of ink layers within the achievable tolerance zones. The aggregate thickness of the multiple ink layers within a zone will vary at the outside of each layer to reflect the variation in the boundary position of each layer according to a normal distribution curve across a tolerance width referenced 2T. Fig. 7 illustrates a design colour as a multiple layer deposit, but even if multiple layers are required to achieve the desired opacity of a black multilayer deposit 4 and a white multilayer deposit 2, design colour layer 3 could be a single layer in most practical embodiments of the invention.

[0051] It should be understood that in Figs. 1 to 7 the design colour 3 could be a four colour process layer within the same dimensional tolerance discipline as if it were a uniform colour layer, the four colour ink deposits extending beyond the boundaries of the white layer 2 for the through combination embodiments, but maintained within the white layer 2 for the lateral combination embodiments.

[0052] Figs. 8A through to 8D illustrate Lateral Combination embodiments of partial printing.

[0053] Five print portions are illustrated which shall be referred to as 1 - 5 numbering from the left hand side.

[0054] Fig. 8A illustrates a panel of the invention in which second colour layer 11 lies within first white layer 12 printed onto substrate 14 within the left hand outer boundary on the first print portion to the right hand outer boundary on the fourth print portion.

[0055] Fig. 8B is similar to 8A except that design colour layer 11 falls within two exactly superimposed layers, white layer 12 and black layer 13.

[0056] In Fig. 8C, second colour layer 11 lies within

white layer 12, which in turn lies within black layer 13.

[0057] The order of printing the layers may be reversed. For example, in Fig. 8D, the second layer 11 is first printed onto substrate 14, then the white layer and then the black layer 13.

[0058] Figs. 9A and 9B illustrate Through Combination embodiments of the invention.

[0059] In Fig. 9A, substrate 15 is typically black or dark coloured. Second colour layer 11 overlies and extends beyond white layer 12.

[0060] In Fig. 9B, 14 is a transparent substrate, each print portion comprising a white layer lying within a black layer. Second colour layer 11 overlies and extends beyond white layer 12 but lies within black layer 13.

[0061] The order of printing the layers may be reversed. For example, in Fig. 9C, the second layer 11 is first printed onto substrate 14, then the white layer and then the black layer 13.

[0062] Figs. 10A through to 10C illustrate the Improved Exact Registration embodiments of the invention.

[0063] In Fig. 10A, second colour layer 11 is exactly superimposed on white layer 12 within its outer boundaries.

[0064] Fig. 10B is similar to Fig. 10A except that black layer 13 underlies white layer 12 with exact registration.

[0065] In Fig. 10C, white layer 12 lies within black layer 13 and is overlain by second colour layer 11 within the outer boundaries of second colour layer 11, layer 11 being in exact registration with black layer 13.

[0066] Fig. 11 illustrates the Thermal Transfer Differential Adhesion Method 1. A conventional thermal transfer resin ribbon 32 comprises a polyester support 16 and a pigmented resin layer 31. This is presented to a pre-printed substrate 14 which is partially printed, preferably by rotary screen printing of opaque pvc gloss ink to form a pre-printed pattern of a white layer 12 which may be underlain by a black layer 13 and may be overlain by a relatively highly plasticised pvc based clear ink or lacquer. A suitable lacquer is HG-70 manufactured by Wiederhold. The pre-printed substrate passes under a hot element imaging array 17 containing mini heat presses which are conventionally activated to melt and bond the pigmented resin layer 31 onto the desired second design layer 11. The pigmented resin layer is only transferred to and bonded to the pre-printed portions and not to the intermediate areas of substrate 14.

[0067] Fig. 11 may also be considered to illustrate the Electrographic Differential Adhesion Method 2, except that 32 represents an electrographically printed conventional transfer medium, the support 16 typically being of paper and 31 representing the image transfer material which may incorporate a uv resistant wearcoat, all printed for example using the Scotchprint™ process, a trademark of the Minnesota Mining and Manufacturing Company. The pre-printed design 31 is transferred to the pre-printed substrate as previously described in Method 1 by a combination of heat and pressure of laminating roll-

ers 17.

[0068] Fig. 12 illustrates the Ink Jet Differential Adhesion Method 3. A pre-printed substrate incorporates a hydrophilic ink layer 12, preferably a white ink which may be underlain by a black layer 13 which also may be hydrophilic ink. The black layer 13 may be in substantially exact registration with layer 12 as in Fig. 12A or may extend beyond the edges of layer 12, as in Fig. 12B. Ink jet or ink jet array 41 deposits water based transparent or translucent inks in a conventional manner as if to form a continuous image 11. However the ink is only adhered to and cured to the pre-printed ink 12 in the desired image. "Free" ink 18 applied between the pre-printed portions is rejected by the substrate and is either absorbed into black layer 13, where it becomes relatively invisible, or is removed in an immediate in line process, by such means of an air knife, a cleaning roller or other means.

[0069] Fig. 13 illustrates the Electrostatic Chargeable Print Pattern Method 4. A part-processed substrate 21 comprises a substrate 14 and a pre-printed pattern 12 which comprises an electrostatically chargeable first layer, printed by any method, preferably comprising a white ink screen printed roll to roll by rotary screen printing. The pre-printed pattern may comprise more than one layer, for example a white layer on a black layer, with or without another electrostatically chargeable layer, and is preferably opaque.

[0070] The pre-printed substrate is fed from roll 25 through an electrostatic writing Stylus 22 which selectively charges only the pre-printed portions with the desired latent electrostatic image for the particular colour of toner in the toner fountain 23, which applies the required second layer image 19 to the pre-printed pattern only, leaving the intermediate areas of substrate 14 unprinted.

[0071] In all the above embodiments and methods, it is generally advantageous for one or more layers to be opaque, typically of opaque white and/or black, onto which transparent or translucent second layer inks can be applied, typically by a four colour digital printing system.

[0072] In all the above embodiments and methods, it is generally advantageous within all print portions within the outer boundaries of a second layer, for the ratio of the second layer width to the white layer width to have substantially the same value, in order to achieve consistent perceived colours.

[0073] It should also be understood that similar dimensional disciplines are appropriate for special inks or other imaging material such as luminescent, fluorescent, iridescent, phosphorescent, metallic or other eye attracting materials. The invention is also beneficial for the production of retro-reflective panels involving the partial deposition of retro-reflective materials and/or the partial printing of other inks, typically transparent or translucent inks, over retro-reflective materials.

[0074] Retro-reflective materials are commonly used

in such fields as road signs, safety clothing, reflectors on bicycles and motor vehicles, advertisements and the like products, typically intended to be illuminated by the headlights of vehicles.

[0075] A retro-reflective material is one which causes an incident spectral ray of light to be reflected back substantially parallel to and substantially along the same path as the incident ray of light. Retro-reflective materials commonly incorporate an array of retro-reflective devices, such as "cube corners" or partially metallised glass or transparent plastic microspheres. One such device consists of faceted surfaces, typically three "silvered", reflective orthogonal surfaces meeting at a point which may be considered as the internal corner of a mirror surfaced cube, any incident ray of light being reflected from one surface to another, to emerge reflected back along a substantially similar path as the incident ray.

[0076] Another such device is a partially silvered or otherwise metallised transparent microsphere or "bead", arranged such that a ray of light, incident on an unmetallised part of the surface of any microsphere passes into the microsphere and is reflected back along a substantially similar path as the incident ray. Such microspheres are typically located within a clear or coloured transparent resin, which might form the matrix of an ink containing the microspheres.

[0077] In certain common applications, such as road traffic signs, the devices are contained within flexible or rigid substrates and are overprinted with ink. In certain cases the retro-reflective materials are overprinted with opaque ink over part of their area, for example in the form of indicia, thus forming a highly contrasting and visible sign when "caught" in the beam of a headlight.

[0078] Alternatively, transparent or translucent inks can be applied over the retro-reflective material and thus be illuminated by incident light which passes through the light permeable ink to the retro-reflective devices and returns through the coloured ink.

[0079] If retro-reflective microspheres are located within a coloured resin or other ink matrix, such inks are similarly retro-reflective.

[0080] The present invention enables particular improvements to be made to some of the above known products and methods incorporating retro-reflective materials. Ink containing retro-reflective microspheres is necessarily coarse in texture and achievable printing tolerances are typically worse than can be achieved with conventional inks. According to the present invention, retro-reflective ink can form the background layer 2 in Figs. 2 to 7, to transparent or translucent design inks 3. Alternatively, retro-reflective ink may form the design colour layer 3, normally in lateral combination embodiments such as illustrated in Figs. 3, 5 and 6.

[0081] The substrate may be flat, curved or moulded, to suit particular embodiments of the invention.

Claims

1. A panel comprising a substantially imperforate substrate (14) with a print pattern adhered to said substrate, said print pattern comprising a plurality of discrete elements and/or surrounding a plurality of unprinted areas of said substrate, said print pattern comprising at least three superimposed layers, including a black layer (13), a second colour layer (11) comprising a single colour layer or a four colour printing process layer, and said print pattern further comprising a white layer (12), and wherein a particular cross-section taken through said panel comprises said substrate having two outer edges and said print pattern having alternate printed portions and unprinted portions, and wherein every printed portion has two outer edges, and wherein within said particular cross-section of said panel said second colour layer has two outer boundaries, one of said two outer boundaries being located on one of said printed portions and the other of said two outer boundaries being located on another of said printed portions, there being a plurality of printed portions between said one printed portion and said another printed portion, and each of said printed portions between said two outer boundaries are constructed and arranged such that they include a part of said black layer and a part of said second colour layer and a part of said white layer and they include two outer edges respectively of said part of said black layer and said part of said second colour layer and said part of said white layer, and wherein said two outer edges of said part of said second colour layer are within said two outer edges of said part of said black layer, and wherein the width between said two outer edges of each of said printed portions is less than one centimetre, characterised in that within each of said plurality of printed portions said part of said white layer is located between said part of said second colour layer and said part of said black layer, and said two outer edges of said part of said white layer are spaced within said two outer edges of said part of said black layer, and wherein said two outer edges of said part of said white layer are spaced within said two outer edges of said part of said second colour layer, and wherein the width of said part of said white layer between said two outer edges of said part of said white layer is less than the width of said part of said second colour layer between said two outer edges of said part of said second colour layer, and wherein said second colour layer is transparent or translucent, and within at least one of said printed portions having both said two outer edges within and spaced from said two outer edges of said substrate, the width between said two outer edges of said part of said second colour layer differs from the width of said at least one of said printed portions by at least 10% of the width of said part of said sec-

ond colour layer.

2. A panel as claimed in Claim 1, wherein said print pattern comprises a pattern of lines.
3. A panel as claimed in Claim 1 or Claim 2, wherein within said each of said plurality of printed portions between said two outer boundaries having both said two outer edges within and spaced from said two outer edges of said substrate, said width of said part of said second colour layer differs from the width of the printed portion by at least 10% of the width of said part of said second colour layer.
4. A panel as claimed in any preceding claim, wherein each of said printed portions having two outer edges within and spaced from said two outer edges of said substrate are of substantially uniform width.
5. A panel as claimed in any preceding claim, wherein said width between the two outer edges of each of said printed portions is less than 1 mm.
6. A panel as claimed in any preceding claim, wherein every said printed portion comprises a colourless layer.
7. A panel as claimed in any preceding claim, wherein within each of said plurality of printed portions said two outer edges of said part of said white layer are within and spaced from said two outer edges of said part of said second colour layer.
8. A panel as claimed in any preceding claim, wherein said second colour layer comprises retro-reflective ink.
9. A panel as claimed in any preceding claim, wherein a plurality but not all of said printed portions between said two outer edges of the substrate comprise said second colour layer.
10. A panel as claimed in any preceding claim, wherein said second colour layer comprises a four colour printing process layer comprising a single colour material which is discontinuous within at least one of said printed portions.
11. A panel as claimed in any preceding claim, wherein said black layer is in direct contact with said substrate.
12. A panel as claimed in any one of claims 1 to 11, wherein said second colour layer is in direct contact with said substrate.
13. A panel as claimed in any preceding claim, wherein said substrate is transparent.

14. A panel as claimed in any preceding claim, wherein one of said two outer edges of said part of said second colour layer is coincident with one of said two outer edges of said part of said black layer.
15. A panel as claimed in any preceding claim, wherein said black layer comprises a plurality of layers.
16. A panel as claimed in any preceding claim, wherein said black layer comprises four black layers.
17. A panel as claimed in any preceding claim, wherein said white layer comprises a plurality of layers.
18. A panel as claimed in any preceding claim, wherein said white layer comprises four white layers.
19. A panel as claimed in any preceding claim, wherein said white layer comprises ten white layers.
20. A panel as claimed in any preceding claim, wherein within each of said plurality of printed portions the ratio of the width between the two outer edges of said part of said second colour layer to the width between said two outer edges of said part of said white layer is of substantially uniform value.
21. A panel comprising a substantially imperforate substrate (6,14) with a print pattern adhered to said substrate, said print pattern comprising a plurality of discrete elements and/or surrounding a plurality of unprinted areas of said substrate, said print pattern comprising at least three superimposed layers, including a black layer (4,13), a second colour layer (3,11) comprising a single colour layer or a four colour printing process layer, and said print pattern further comprising a retro-reflective layer (2,12), and wherein a particular cross-section taken through said panel comprises said substrate having two outer edges and said print pattern having alternate printed portions and unprinted portions, and wherein every printed portion has two outer edges, and wherein within said particular cross-section of said panel said second colour layer has two outer boundaries, one of said two outer boundaries being located on one of said printed portions and the other of said two outer boundaries being located on another of said printed portions, there being a plurality of printed portions between said one printed portion and said another printed portion, and each of said printed portions between said two outer boundaries are constructed and arranged such that they include a part of said black layer and a part of said second colour layer and a part of said retro-reflective layer and they include two outer edges respectively of said part of said black layer and said part of said second colour layer and said part of said retro-reflective layer, and wherein said two outer edges

es of said part of said second colour layer are within said two outer edges of said part of said black layer, and wherein the width between said two outer edges of each of said printed portions is less than one centimetre, characterised in that within each of said plurality of printed portions said part of said retro-reflective layer is located between said part of said second colour layer and said part of said black layer, and said two outer edges of said part of said retro-reflective layer are spaced within said two outer edges of said part of said black layer, and wherein said two outer edges of said part of said retro-reflective layer are within said two outer edges of said part of said second colour layer, and wherein the width of said part of said retro-reflective layer between said two outer edges of said part of said retro-reflective layer is less than the width of said part of said second colour layer between said two outer edges of said part of said second colour layer, and wherein said second colour layer is transparent or translucent, and within at least one of said printed portions having both said two outer edges within and spaced from said two outer edges of said substrate, the width between said two outer edges of said part of said second colour layer differs from the width of said at least one of said printed portions by at least 10%- of the width of said part of said second colour layer.

22. A method of making a panel comprising a substantially imperforate substrate (14) with a print pattern adhered to said substrate, said print pattern comprising a plurality of discrete elements and/or surrounding a plurality of unprinted areas of said substrate, said print pattern comprising at least three superimposed layers, including a black layer (13), a second colour layer (11) comprising a single colour layer or a four colour printing process layer, and said print pattern further comprising a white layer (12), and wherein a particular cross-section taken through said panel comprises said substrate having two outer edges and said print pattern having alternate printed portions and unprinted portions, and wherein every printed portion has two outer edges, and wherein within said particular cross-section of said panel said second colour layer has two outer boundaries, one of said two outer boundaries being located on one of said printed portions and the other of said two outer boundaries being located on another of said printed portions, there being a plurality of printed portions between said one printed portion and said another printed portion, and each of said printed portions between said two outer boundaries are constructed and arranged such that they include a part of said black layer and a part of said second colour layer and a part of said white layer and they include two outer edges respectively of said part of said black layer and said part of said

second colour layer and said part of said white layer, and wherein said two outer edges of said part of said second colour layer are within said two outer edges of said part of said black layer, and wherein the width between said two outer edges of each of said printed portions is less than one centimetre, characterised in that within each of said plurality of printed portions said part of said white layer is located between said part of said second colour layer and said part of said black layer, and said two outer edges of said part of said white layer are spaced within said two outer edges of said part of said black layer, and wherein said two outer edges of said part of said white layer are within said two outer edges of said part of said second colour layer, and wherein the width of said part of said white layer between said two outer edges of said part of said white layer is less than the width of said part of said second colour layer between said two outer edges of said part of said second colour layer, and wherein said second colour layer is transparent or translucent, said method comprising: printing said second colour layer within said each of said printed portions between said two outer boundaries of said second colour layer by applying at least a part of a presented width of said second colour layer within said each of said printed portions and said presented width of said second colour layer only adheres within said each of said printed portions, and within at least one of said printed portions having both said two outer edges within and spaced from said two outer edges of said substrate, said presented width of said part of said second colour layer differs from the width of said at least one of said printed portions by at least 10% of the width of said part of said second colour layer.

23. A method as claimed in Claim 22, wherein said black layer is hydrophilic.
24. A method as claimed in Claim 22 or Claim 23, wherein said white layer is hydrophilic.
25. A method as claimed in any of Claims 22 - 24, wherein the surface of said substrate within said unprinted portions is hydrophobic.
26. A method as claimed in any of Claims 22 - 25, wherein said four colour printing process is a digital printing process.
27. A method as claimed in any of Claims 22 - 26, wherein said second colour layer comprises thermal transfer pigmented resin.
28. A method as claimed in any of claims 22 - 27, wherein both of said two outer edges of said part of said second colour layer are coincident with both of

said two outer edges of said part of said black layer.

29. A method of making a panel according to claim 22, in which said substrate is transparent and said print pattern comprises a pattern of opaque lines, said second colour layer is printed by a digital printing machine comprising an optical scanning device, and said substrate is fed through said digital printing machine in a direction perpendicular to said opaque lines, and said optical scanning device identifies the leading and trailing edges of said opaque lines and instructs said digital printing machine to print onto said opaque lines but not onto said transparent areas of said substrate between said opaque lines.
30. A method of making a panel according to claim 22, wherein said black layer is printed onto said substrate in the form of said print pattern, said white layer is printed over said black layer, and said second colour layer is applied over said substrate between said two outer boundaries, and said second colour layer adheres to said plurality of said printed portions within said two outer boundaries and does not adhere to said substrate within said unprinted portions within said two outer boundaries.
31. A method as claimed in claim 30, wherein said second colour layer comprises thermal transfer pigmented resin which is transferred to said plurality of said printed portions but not to said unprinted portions.
32. A method as claimed in claim 30, wherein said second colour layer comprises ink which adheres to and cures on said plurality of said printed portions but does not adhere to or cure on said unprinted portions.
33. A method as claimed in claim 22, wherein said second colour layer is ink jet printed.
34. A method as claimed in claim 22, wherein said second colour layer comprises electrographically printed material transferred from a transfer medium to said print pattern.
35. A method as claimed in claim 22, wherein within each of said plurality of printed portions a clear material layer is applied over the white background layer, said clear material layer being receptive to said second colour layer, and said second colour layer is applied to said clear material layer.
36. A method as claimed in claim 22, said substrate comprising a sheet of transparent material; printing select areas of said transparent material with said black layer and said white layer of said print pattern; instructing a digital printing machine to print said

second colour layer on select portions of said printed select areas.

37. A method as claimed in claim 36 further comprising scanning said sheet of transparent material and said printed select areas thereon so as to identify leading edges and trailing edges of said printed select areas, and wherein said instructing is based on said identified leading edges and trailing edges of said printed select areas.
38. A method as claimed in claim 37, further comprising instructing said digital printing machine so that it does not print on any unprinted areas of said transparent material.
39. A method as claimed in claim 36, wherein said print pattern comprises a plurality of lines.
40. A method as claimed in claim 36, wherein said print pattern is opaque.
41. A method as claimed in claim 39, wherein said transparent material is fed for printing by said digital printing machine in a direction perpendicular to said lines.
42. A method as claimed in claim 36, wherein said digital printing machine is a thermal transfer digital printing machine.
43. A method as claimed in claim 36, wherein said digital printing machine is an ink jet digital printing machine.
44. A method as claimed in claim 36, wherein said digital printing machine uses a Raster Image Processor for enabling the positioning and size of deposits of black, cyan, magenta and yellow marking material in a four colour process to form said superimposed layer.

Patentansprüche

1. Platte, welche ein praktisch nicht perforiertes Substrat (14) umfasst mit einem auf dem Substrat haftenden Druckmuster, wobei das Druckmuster eine Vielzahl von einzelnen Elementen umfasst und/oder eine Vielzahl von unbedruckten Flächen des Substrats umgibt, wobei das Druckmuster zumindest drei übereinander liegende Schichten umfasst, einschließlich einer schwarzen Schicht (13), einer zweiten Farbschicht (11), welche eine einzelne Farbschicht oder eine Vierfarbendruck-Schicht umfasst, und wobei das Druckmuster ferner eine weiße Schicht (12) umfasst, und bei welcher ein bestimmter Querschnitt der

- Platte das Substrat umfasst, welches zwei äußere Ränder aufweist sowie das Druckmuster, welches abwechselnd bedruckte und unbedruckte Abschnitte aufweist, und wobei jeder bedruckte Abschnitt zwei äußere Ränder aufweist, und bei welcher innerhalb des bestimmten Querschnitts der Platte die zweite Farbschicht zwei äußere Begrenzungen aufweist, wobei eine der beiden äußeren Begrenzungen auf einem der bedruckten Abschnitte platziert ist und die andere der beiden äußeren Begrenzungen auf einem anderen bedruckten Abschnitt platziert ist, wobei es zwischen dem einen bedruckten Abschnitt und dem anderen bedruckten Abschnitt eine Vielzahl von bedruckten Abschnitten gibt, und jeder der bedruckten Abschnitte zwischen den beiden äußeren Begrenzungen so konstruiert und angebracht ist, dass er einen Teil der schwarzen Schicht und einen Teil der zweiten Farbschicht und einen Teil der weißen Schicht einschließt und jeweils zwei äußere Ränder des Teils der schwarzen Schicht und des Teils der zweiten Farbschicht und des Teils der weißen Schicht einschließt, und wobei die äußeren Ränder des Teils der zweiten Farbschicht sich innerhalb der beiden äußeren Ränder des Teils der schwarzen Schicht befinden, und wobei die Breite zwischen den beiden äußeren Rändern jedes gedruckten Abschnitts weniger als 1 Zentimeter beträgt, dadurch gekennzeichnet, dass innerhalb der Vielzahl von bedruckten Abschnitten der Teil der weißen Schicht zwischen dem Teil der zweiten Farbschicht und dem Teil der schwarzen Schicht liegt, und die beiden äußeren Ränder des Teils der weißen Schicht mit einem Abstand innerhalb der beiden äußeren Ränder des Teils der schwarzen Schicht platziert sind, und wobei die beiden äußeren Ränder des Teils der weißen Schicht sich innerhalb der beiden äußeren Ränder des Teils der zweiten Farbschicht befinden, und wobei die Breite des Teils der weißen Schicht zwischen den zwei äußeren Rändern des Teils der zweiten Farbschicht zwischen den beiden äußeren Rändern des Teils der zweiten Farbschicht größer ist als die Breite des Teils der zweiten Farbschicht zwischen den beiden äußeren Rändern des Teils der zweiten Farbschicht, und wobei die zweite Farbschicht transparent oder durchsichtig ist, und innerhalb zumindest einem der gedruckten Abschnitte, dessen zwei äußere Ränder sich mit einem gewissen Abstand innerhalb der beiden äußeren Ränder des Substrats befinden, die Breite zwischen den beiden äußeren Rändern des Teils der zweiten Farbschicht von der Breite zumindest eines der gedruckten Abschnitte um zumindest 10 % der Breite des Teils der zweiten Farbschicht abweicht.
2. Platte nach Anspruch 1, bei welcher das Druckmuster ein Linienmuster umfasst.
 3. Platte nach Anspruch 1 oder 2, bei welcher innerhalb jedes bedruckten Abschnitts der Vielzahl von bedruckten Abschnitten zwischen den beiden äußeren Begrenzungen, bei welchen sich die zwei äußeren Ränder in einem Abstand innerhalb der zwei äußeren Ränder des Substrats befinden, die Breite des Teils der zweiten Farbschicht von der Breite des bedruckten Abschnitts um mindestens 10 % der Breite der zweiten Farbschicht abweicht.
 4. Platte nach einem der vorhergehenden Ansprüche, bei welcher jeder der bedruckten Abschnitte, dessen zwei äußere Ränder sich innerhalb der beiden äußeren Ränder des Substrats und beabstandet von diesen befinden, eine im Wesentlichen einheitliche Breite besitzt.
 5. Platte nach einem der vorhergehenden Ansprüche, bei welcher die Breite zwischen den beiden äußeren Rändern jedes bedruckten Abschnitts kleiner als 1 mm ist.
 6. Platte nach einem der vorhergehenden Ansprüche, bei welcher jeder bedruckte Abschnitt eine farblose Schicht umfasst.
 7. Platte nach einem der vorhergehenden Ansprüche, bei welcher innerhalb jedes bedruckten Abschnitts aus der Vielzahl von bedruckten Abschnitten die zwei äußeren Ränder des Teils der weißen Schicht sich innerhalb der zwei äußeren Ränder des Teils der zweiten Farbschicht und beabstandet von diesen befinden.
 8. Platte nach einem der vorhergehenden Ansprüche, bei welcher die zweite Farbschicht retroreflektierende Tinte umfasst.
 9. Platte nach einem der vorhergehenden Ansprüche, bei welcher eine Vielzahl, jedoch nicht alle der bedruckten Abschnitte zwischen den zwei äußeren Rändern des Substrats die zweite Farbschicht umfassen.
 10. Platte nach einem der vorhergehenden Ansprüche, bei welcher die zweite Farbschicht eine Vierfarbendruck-Schicht umfasst, welche eine einzelne Materialschicht umfasst, welche innerhalb zumindest einer der bedruckten Abschnitte diskontinuierlich ist.
 11. Platte nach einem der vorhergehenden Ansprüche, bei welcher die schwarze Schicht sich in direktem Kontakt zum Substrat befindet.
 12. Platte nach einem der Ansprüche 1 bis 11, bei welcher die zweite Farbschicht sich in direktem Kontakt zum Substrat befindet.

13. Platte nach einem der vorhergehenden Ansprüche, bei welcher das Substrat transparent ist.
14. Platte nach einer der vorhergehenden Ansprüche, bei welcher einer der zwei äußeren Ränder des Teils der zweiten Farbschicht mit einem der zwei äußeren Ränder der schwarzen Schicht übereinstimmt. 5
15. Platte nach einem der vorhergehenden Ansprüche, bei welcher die schwarze Schicht eine Vielzahl von Schichten umfasst. 10
16. Platte nach einem der vorhergehenden Ansprüche, bei welcher die schwarze Schicht vier schwarze Schichten umfasst. 15
17. Platte nach einem der vorhergehenden Ansprüche, bei welcher die weiße Schicht eine Vielzahl von Schichten umfasst. 20
18. Platte nach einem der vorhergehenden Ansprüche, bei welcher die weiße Schicht vier weiße Schichten umfasst. 25
19. Platte nach einem der vorhergehenden Ansprüche, bei welcher die weiße Schicht zehn weiße Schichten umfasst.
20. Platte nach einem der vorhergehenden Ansprüche, bei welcher innerhalb jedes bedruckten Abschnitts aus der Vielzahl der bedruckten Abschnitte das Verhältnis der Breite zwischen den zwei äußeren Rändern des Teils der zweiten Farbschicht zur Breite zwischen den zwei äußeren Rändern des Teils der weißen Farbschicht einen im wesentlichen einheitlichen Wert darstellt. 30 35
21. Platte, welche ein praktisch nicht perforiertes Substrat (6, 14) umfasst, mit einem am Substrat haftenden Druckmuster, wobei das Druckmuster eine Vielzahl einzelner Elemente umfasst und/oder eine Vielzahl unbedruckter Flächen des Substrats umfasst, wobei das Druckmuster zumindest drei übereinander liegende Schichten umfasst, zu welcher eine schwarze Schicht (4, 13), eine zweite Farbschicht (3, 11), eine einzelne Farbschicht oder eine Vierfarbendruck-Schicht gehören, wobei das Druckmuster ferner eine retroreflektive Schicht (2, 12) umfasst, 40 45
und bei welcher ein bestimmter Querschnitt durch die Platte das Substrat umfasst, welches zwei äußere Ränder aufweist sowie das Druckmuster, welches abwechselnd bedruckte Abschnitte und unbedruckte Abschnitte aufweist, wobei jeder bedruckte Abschnitt zwei äußere Ränder aufweist, 50 55
und bei welcher innerhalb des bestimmten Querschnitts der Platte die zweite Farbschicht zwei äußere Begrenzungen aufweist, wovon eine der beiden äußeren Begrenzungen auf einem der bedruckten Abschnitte liegt und die andere der beiden äußeren Begrenzungen auf einem anderen der bedruckten Abschnitte, wobei eine Vielzahl von bedruckten Abschnitten zwischen dem einen bedruckten Abschnitt und dem anderen bedruckten Abschnitt liegen, und wobei jeder der bedruckten Abschnitte zwischen den beiden äußeren Begrenzungen so konstruiert und angeordnet ist, dass er einen Teil der schwarzen Schicht und einen Teil der zweiten Farbschicht und einen Teil der retroreflektiven Schicht einschließt und er jeweils zwei äußere Ränder des Teils der schwarzen Schicht und des Teils der zweiten Farbschicht und des Teils der retroreflektiven Schicht einschließt, und wobei die beiden äußeren Ränder des Teils der zweiten Farbschicht sich innerhalb der zwei äußeren Ränder des Teils der schwarzen Schicht befinden, und bei welcher die Breite zwischen den zwei äußeren Rändern jedes der gedruckten Abschnitte weniger als 1 Zentimeter beträgt, dadurch gekennzeichnet, dass innerhalb jedes gedruckten Abschnitts der Vielzahl von gedruckten Abschnitten der Teil der retroreflektiven Schicht zwischen dem Teil der zweiten Farbschicht und dem Teil der schwarzen Schicht liegt, und wobei die zwei äußeren Ränder des Teils der retroreflektiven Schicht sich zwischen den beiden äußeren Rändern des Teils der schwarzen Schicht befinden, und wobei die zwei äußeren Ränder des Teils der retroreflektiven Schicht sich innerhalb der zwei äußeren Ränder des Teils der zweiten Farbschicht befinden, und wobei die Breite des Teils der retroreflektiven Schicht zwischen den beiden äußeren Rändern des Teils der retroreflektiven Schicht kleiner ist als die Breite des Teils der zweiten Farbschicht zwischen den zwei äußeren Rändern des Teils der zweiten Farbschicht, und wobei die zweite Farbschicht transparent oder durchsichtig ist, und innerhalb zumindest einem der gedruckten Abschnitte, dessen zwei äußere Ränder sich innerhalb der beiden äußeren Ränder des Substrats und beabstandet von diesen befinden, weicht die Breite zwischen den beiden äußeren Rändern des Teils der zweiten Farbschicht von der Breite zumindest eines der gedruckten Abschnitte um zumindest 10 % der Breite des Teils der zweiten Farbschicht ab.
22. Verfahren zur Herstellung einer Platte, welche ein praktisch nicht perforiertes Substrat (14) umfasst, mit einem am Substrat haftenden Druckmuster, wobei das Druckmuster eine Vielzahl einzelner Elemente umfasst und/oder eine Vielzahl unbedruckter Flächen des Substrats umfasst, wobei das Druckmuster zumindest drei übereinander liegende

Bere Begrenzungen aufweist, wovon eine der beiden äußeren Begrenzungen auf einem der bedruckten Abschnitte liegt und die andere der beiden äußeren Begrenzungen auf einem anderen der bedruckten Abschnitte, wobei eine Vielzahl von bedruckten Abschnitten zwischen dem einen bedruckten Abschnitt und dem anderen bedruckten Abschnitt liegen, und wobei jeder der bedruckten Abschnitte zwischen den beiden äußeren Begrenzungen so konstruiert und angeordnet ist, dass er einen Teil der schwarzen Schicht und einen Teil der zweiten Farbschicht und einen Teil der retroreflektiven Schicht einschließt und er jeweils zwei äußere Ränder des Teils der schwarzen Schicht und des Teils der zweiten Farbschicht und des Teils der retroreflektiven Schicht einschließt, und wobei die beiden äußeren Ränder des Teils der zweiten Farbschicht sich innerhalb der zwei äußeren Ränder des Teils der schwarzen Schicht befinden, und bei welcher die Breite zwischen den zwei äußeren Rändern jedes der gedruckten Abschnitte weniger als 1 Zentimeter beträgt, dadurch gekennzeichnet, dass innerhalb jedes gedruckten Abschnitts der Vielzahl von gedruckten Abschnitten der Teil der retroreflektiven Schicht zwischen dem Teil der zweiten Farbschicht und dem Teil der schwarzen Schicht liegt, und wobei die zwei äußeren Ränder des Teils der retroreflektiven Schicht sich zwischen den beiden äußeren Rändern des Teils der schwarzen Schicht befinden, und wobei die zwei äußeren Ränder des Teils der retroreflektiven Schicht sich innerhalb der zwei äußeren Ränder des Teils der zweiten Farbschicht befinden, und wobei die Breite des Teils der retroreflektiven Schicht zwischen den beiden äußeren Rändern des Teils der retroreflektiven Schicht kleiner ist als die Breite des Teils der zweiten Farbschicht zwischen den zwei äußeren Rändern des Teils der zweiten Farbschicht, und wobei die zweite Farbschicht transparent oder durchsichtig ist, und innerhalb zumindest einem der gedruckten Abschnitte, dessen zwei äußere Ränder sich innerhalb der beiden äußeren Ränder des Substrats und beabstandet von diesen befinden, weicht die Breite zwischen den beiden äußeren Rändern des Teils der zweiten Farbschicht von der Breite zumindest eines der gedruckten Abschnitte um zumindest 10 % der Breite des Teils der zweiten Farbschicht ab.

22. Verfahren zur Herstellung einer Platte, welche ein praktisch nicht perforiertes Substrat (14) umfasst, mit einem am Substrat haftenden Druckmuster, wobei das Druckmuster eine Vielzahl einzelner Elemente umfasst und/oder eine Vielzahl unbedruckter Flächen des Substrats umfasst, wobei das Druckmuster zumindest drei übereinander liegende

Schichten umfasst, zu welcher eine schwarze Schicht (13) sowie eine zweite Farbschicht (11) gehören, welche eine einzelne Farbschicht oder eine Vierfarbendruck-Schicht umfasst, wobei das Druckmuster ferner eine weiße Schicht (12) umfasst, und bei welcher ein bestimmter Querschnitt durch die Platte das Substrat umfasst, welches zwei äußere Ränder aufweist sowie das Druckmuster, welches abwechselnd bedruckte Abschnitte und unbedruckte Abschnitte aufweist, wobei jeder bedruckte Abschnitt zwei äußere Ränder aufweist, und bei welcher innerhalb des bestimmten Querschnitts der Platte die zweite Farbschicht zwei äußere Begrenzungen aufweist, wovon eine der beiden äußeren Begrenzungen auf einem der bedruckten Abschnitte liegt und die andere der beiden äußeren Begrenzungen auf einem anderen der bedruckten Abschnitte, wobei eine Vielzahl von bedruckten Abschnitten zwischen dem einen bedruckten Abschnitt und dem anderen bedruckten Abschnitt liegt, und wobei jeder der bedruckten Abschnitte zwischen den beiden äußeren Begrenzungen so konstruiert und angeordnet ist, dass er einen Teil der schwarzen Schicht und einen Teil der zweiten Farbschicht und einen Teil der weißen Schicht einschließt, und sie schließt jeweils zwei äußere Ränder des Teils der schwarzen Schicht und des Teils der zweiten Farbschicht und des Teils der weißen Schicht ein, und wobei die beiden äußeren Ränder des Teils der zweiten Farbschicht sich innerhalb der zwei äußeren Ränder des Teils der schwarzen Schicht befinden, und bei welcher die Breite zwischen den zwei äußeren Rändern jedes der gedruckten Abschnitte weniger als 1 Zentimeter beträgt, dadurch **gekennzeichnet**, dass innerhalb jedes gedruckten Abschnitts der Vielzahl von gedruckten Abschnitten der Teil der weißen Schicht zwischen dem Teil der zweiten Farbschicht und dem Teil der schwarzen Schicht liegt, und wobei die zwei äußeren Ränder des Teils der weißen Schicht sich zwischen den beiden äußeren Rändern des Teils der schwarzen Schicht befinden, und wobei die zwei äußeren Ränder des Teils der weißen Schicht sich innerhalb der zwei äußeren Ränder des Teils der zweiten Farbschicht befinden, und wobei die Breite des Teils der weißen Schicht zwischen den beiden äußeren Rändern des Teils der weißen Schicht kleiner ist als die Breite des Teils der zweiten Farbschicht zwischen den zwei äußeren Rändern des Teils der zweiten Farbschicht, und wobei die zweite Farbschicht transparent oder durchsichtig ist, wobei das Verfahren umfasst: Drucken der zweiten Farbschicht innerhalb jedem der bedruckten Abschnitte zwischen den beiden äußeren Begrenzungen der zweiten Farbschicht durch Aufbringen zu-

mindest eines Teils einer vorgegebenen Breite der zweiten Farbschicht innerhalb jedem der bedruckten Abschnitte, wobei die vorgegebene Breite der zweiten Farbschicht nur innerhalb jedem der bedruckten Abschnitte haftet, und innerhalb zumindest einem der gedruckten Abschnitte, dessen zwei äußere Ränder sich innerhalb der beiden äußeren Ränder des Substrats und beabstandet von diesen befinden, die vorgegebene Breite des Teils der zweiten Farbschicht von der Breite zumindest eines der gedruckten Abschnitte um zumindest 10 % der Breite des Teils der zweiten Farbschicht abweicht.

23. Verfahren nach Anspruch 22, bei welchem die schwarze Schicht hydrophil ist.

24. Verfahren nach einem der Ansprüche 22 oder 23, bei welchem die weiße Schicht hydrophil ist.

25. Verfahren nach einem der Ansprüche 22 bis 24, bei welchem die Oberfläche des Substrats innerhalb der nicht bedruckten Abschnitte hydrophob ist.

26. Verfahren nach einem der Ansprüche 22 bis 25, bei welchem das Vierfarbendruck-Verfahren ein digitales Druckverfahren ist.

27. Verfahren nach einem der Ansprüche 22 bis 26, bei welchem die zweite Farbschicht Thermotransferpigmentiertes Harz umfasst.

28. Verfahren nach einem der Ansprüche 22 bis 27, bei welchem beide der zwei äußeren Ränder des Teils der zweiten Farbschicht mit beiden der zwei äußeren Ränder des Teils der schwarzen Farbschicht übereinstimmen.

29. Verfahren zur Herstellung einer Platte nach Anspruch 22, bei welchem das Substrat transparent ist und das Druckmuster ein Muster opaker Linien umfasst, wobei die zweite Farbschicht von einer digitalen Druckmaschine gedruckt wird, welche eine optische Scanner-Vorrichtung umfasst, und wobei das Substrat in senkrechter Richtung zu den opaken Linien durch die Druckmaschine zugeführt wird, und die optische Scanner-Vorrichtung die vorderen und hinteren Ränder der opaken Linien erkennt und die Anweisung an die digitale Druckmaschine gibt, auf die opaken Linien zu drucken, aber nicht auf die transparenten Flächen des Substrats zwischen den opaken Linien.

30. Verfahren zur Herstellung einer Platte nach Anspruch 22, wobei die schwarze Schicht in Form des Druckmusters auf das Substrat gedruckt wird, die weiße Schicht über die schwarze Schicht gedruckt wird und die zweite Farbschicht auf das Substrat

aufgetragen wird zwischen den beiden äußeren Begrenzungen, wobei die zweite Farbschicht auf der Vielzahl der bedruckten Abschnitte innerhalb der zwei äußeren Begrenzungen haftet und nicht am Substrat innerhalb der nicht bedruckten Abschnitte innerhalb der zwei äußeren Begrenzungen haftet.

31. Verfahren nach Anspruch 30, bei welchem die bezeichnete zweite Farbschicht Thermotransfer-pigmentiertes Harz umfasst, welches auf die Vielzahl der bedruckten Abschnitte übertragen wird, aber nicht auf die nicht bedruckten Abschnitte.

32. Verfahren nach Anspruch 30, bei welchem die zweite Farbschicht Tinte enthält, welche auf der Vielzahl der bedruckten Abschnitte haftet und aushärtet, aber nicht auf den nicht bedruckten Abschnitten haftet oder aushärtet.

33. Verfahren nach Anspruch 22, bei welchem die zweite Farbschicht mit Tintenstrahl gedruckt wird.

34. Verfahren nach Anspruch 22, bei welchem die zweite Farbschicht elektrographisch gedrucktes Material enthält, das von einem Übertragungsmedium auf das Druckmuster übertragen wird.

35. Verfahren nach Anspruch 22, bei welchem innerhalb jedem bedruckten Abschnitt der Vielzahl von bedruckten Abschnitten eine durchsichtige Materialschicht über der weißen Hintergrundschicht aufgebracht wird, wobei die durchsichtige Materialschicht aufnahmefähig ist für die zweite Farbschicht, und die zweite Farbschicht auf die durchsichtige Materialschicht aufgebracht wird.

36. Verfahren nach Anspruch 22, bei welchem das Substrat eine Schicht aus transparentem Material umfasst, und welches umfasst: Bedrucken von ausgewählten Bereichen des transparenten Materials mit der schwarzen Schicht und der weißen Schicht des Druckmusters; Instruieren einer digitalen Druckmaschine zum Drucken der zweiten Farbschicht auf ausgewählten Abschnitten der gedruckten Auswahlflächen.

37. Verfahren nach Anspruch 36, welches ferner das Scannen der Schicht aus transparentem Material umfasst sowie der darauf gedruckten Auswahlflächen, um vordere und hintere Ränder der gedruckten Auswahlflächen festzustellen, und wobei das Instruieren auf den festgestellten vorderen und hinteren Rändern der gedruckten Auswahlflächen basiert.

38. Verfahren nach Anspruch 37, welches ferner das Instruieren der digitalen Druckmaschine umfasst,

so dass diese nicht auf irgendwelchen nicht bedruckten Flächen des transparenten Materials druckt.

5 39. Verfahren nach Anspruch 36, bei welchem das Druckmuster eine Vielzahl von Linien umfasst.

40. Verfahren nach Anspruch 36, bei welchem das Druckmuster opak ist.

10 41. Verfahren nach Anspruch 39, bei welchem das transparente Material in einer Richtung, die senkrecht zu den Linien ist, von der digitalen Druckmaschine zum Drucken zugeführt wird.

15 42. Verfahren nach Anspruch 36, bei welchem die digitale Druckmaschine aus einer digitalen Thermotransfer-Druckmaschine besteht.

20 43. Verfahren nach Anspruch 36, bei welchem die digitale Druckmaschine eine digitale Tintenstrahl-Druckmaschine ist.

25 44. Verfahren nach Anspruch 36, bei welchem die digitale Druckmaschine einen Raster-Image-Prozessor verwendet, um die Positionierung und Größe der Auflage von schwarzem, cyan, magenta und gelbem Markierungsmaterial bei einem Vierfarben-Druckvorgang zur Herstellung der darüberliegenden Schicht zu ermöglichen.

Revendications

35 1. Panneau comprenant un substrat substantiellement non perforé (14) et un motif imprimé adhérent audit substrat, ledit motif imprimé comprenant une pluralité d'éléments discrets et/ou entourant une pluralité de zones non imprimées dudit substrat, ledit motif imprimé comprenant au moins trois couches superposées, incluant une couche noire (13), une seconde couche colorée (11) comprenant une couche monochrome ou une couche imprimée en quadrichromie, et ledit motif imprimé comprenant en outre une couche blanche (12), et dans lequel une section transversale particulière à travers ledit panneau comprend ledit substrat présentant deux bords extérieurs et ledit motif imprimé comportant des portions imprimées et des portions non imprimées alternées, et dans lequel chaque portion imprimée présente deux bords extérieurs, et dans lequel dans ladite section transversale particulière dudit panneau, ladite seconde couche colorée présente deux limites extérieures, l'une desdites deux limites extérieures étant située sur une première desdites portions imprimées et l'autre desdites deux limites extérieures étant située sur une autre desdites portions imprimées, une pluralité de por-

- tions imprimées se trouvant entre ladite première portion imprimée et ladite autre portion imprimée, et toutes lesdites portions imprimées comprises entre lesdites deux limites extérieures sont construites et arrangées de façon qu'elles incluent une partie de ladite couche noire et une partie de ladite seconde couche colorée et une partie de ladite couche blanche et qu'elles incluent deux bords extérieurs respectivement de ladite partie de ladite couche noire et de ladite partie de ladite seconde couche colorée et de ladite partie de ladite couche blanche, et dans lequel lesdits deux bords extérieurs de ladite partie de ladite seconde couche colorée sont situés à l'intérieur desdits deux bords extérieurs de ladite partie de ladite couche noire, et dans lequel la largeur entre lesdits deux bords extérieurs de chacune desdites portions imprimées est inférieure à un centimètre, caractérisé par le fait que dans chacune de ladite pluralité de portions imprimées, ladite partie de ladite couche blanche est située entre ladite partie de ladite seconde couche colorée et ladite partie de ladite couche noire, et lesdits deux bords extérieurs de ladite partie de ladite couche blanche sont espacés vers l'intérieur desdits deux bords extérieurs de ladite partie de ladite couche noire, et dans lequel lesdits deux bords extérieurs de ladite partie de ladite couche blanche sont espacés vers l'intérieur desdits deux bords extérieurs de ladite partie de ladite seconde couche colorée, et dans lequel la largeur de ladite partie de ladite couche blanche entre lesdits deux bords extérieurs de ladite partie de ladite couche blanche est inférieure à la largeur de ladite partie de ladite seconde couche colorée entre lesdits deux bords extérieurs de ladite partie de ladite seconde couche colorée, et dans lequel ladite seconde couche colorée est transparente ou translucide, et dans au moins une desdites portions imprimées dont lesdits deux bords extérieurs sont espacés vers l'intérieur desdits deux bords extérieurs dudit substrat, la largeur entre lesdits deux bords extérieurs de ladite partie de ladite seconde couche colorée diffère de la largeur de ladite au moins une desdites portions imprimées par au moins 10% de la largeur de ladite partie de ladite seconde couche colorée.
2. Panneau selon la revendication 1, dans lequel ledit motif imprimé comprend un motif de traits.
 3. Panneau selon la revendication 1 ou 2, dans lequel dans chacune de ladite pluralité de portions imprimées, comprises entre lesdites deux limites extérieures, dont lesdits deux bords extérieurs sont espacés vers l'intérieur desdits deux bords extérieurs dudit substrat, ladite largeur de ladite partie de ladite seconde couche colorée diffère de la largeur de la portion imprimée par au moins 10% de la largeur de ladite partie de ladite seconde couche co-

lorée.

4. Panneau selon l'une quelconque des revendications précédentes, dans lequel chacune desdites portions imprimées ayant deux bords extérieurs espacés vers l'intérieur desdits deux bords extérieurs dudit substrat est de largeur sensiblement uniforme.
5. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite largeur entre les deux bords extérieurs de chacune desdites portions imprimées est inférieure à 1 mm.
6. Panneau selon l'une quelconque des revendications précédentes, dans lequel chacune desdites portions imprimées comprend une couche incolore.
7. Panneau selon l'une quelconque des revendications précédentes, dans lequel dans chacune de ladite pluralité de portions imprimées, lesdits deux bords extérieurs de ladite partie de ladite couche blanche sont espacés vers l'intérieur desdits deux bords extérieurs de ladite partie de ladite seconde couche colorée.
8. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite seconde couche colorée comprend une encre réfléchissante.
9. Panneau selon l'une quelconque des revendications précédentes, dans lequel une pluralité desdites portions imprimées comprises entre lesdits deux bords extérieurs du substrat, mais pas toutes, comprennent ladite seconde couche colorée.
10. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite seconde couche colorée comprend une couche imprimée en quadrichromie comprenant une matière monochrome qui est discontinue dans au moins une desdites portions imprimées.
11. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite couche noire est en contact direct avec ledit substrat.
12. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite seconde couche colorée est en contact direct avec ledit substrat.
13. Panneau selon l'une quelconque des revendications précédentes, dans lequel ledit substrat est transparent.
14. Panneau selon l'une quelconque des revendications précédentes, dans lequel l'un desdits deux bords extérieurs de ladite partie de ladite seconde

couche colorée coïncide avec l'un desdits deux bords extérieurs de ladite partie de ladite couche noire.

15. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite couche noire comprend plusieurs couches. 5
16. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite couche noire comprend quatre couches noires. 10
17. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite couche blanche comprend plusieurs couches. 15
18. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite couche blanche comprend quatre couches blanches. 20
19. Panneau selon l'une quelconque des revendications précédentes, dans lequel ladite couche blanche comprend dix couches blanches. 25
20. Panneau selon l'une quelconque des revendications précédentes, dans lequel dans chacune de ladite pluralité de portions imprimées, le rapport de la largeur entre les deux bords extérieurs de ladite partie de ladite seconde couche colorée à la largeur entre lesdits deux bords extérieurs de ladite partie de ladite couche blanche est de valeur sensiblement uniforme. 30
21. Panneau comprenant un substrat substantiellement non perforé (6, 14) et un motif imprimé adhérent audit substrat, ledit motif imprimé comprenant une pluralité d'éléments discrets et/ou entourant une pluralité de zones non imprimées dudit substrat, ledit motif imprimé comprenant au moins trois couches superposées, incluant une couche noire (4, 13), une seconde couche colorée (3, 11) comprenant une couche monochrome ou une couche imprimée en quadrichromie, et ledit motif imprimé comprenant en outre une couche réfléchissante (2, 12), et dans lequel une section transversale particulière à travers ledit panneau comprend ledit substrat présentant deux bords extérieurs et ledit motif imprimé comportant des portions imprimées et des portions non imprimées alternées, et dans lequel chaque portion imprimée présente deux bords extérieurs, et dans lequel dans ladite section transversale particulière dudit panneau, ladite seconde couche colorée présente deux limites extérieures, l'une desdites deux limites extérieures étant située sur une première desdites portions imprimées et l'autre desdites deux limites extérieures étant située sur une autre desdites portions imprimées, une pluralité de portions imprimées se trouvant entre ladite 35 40 45 50 55

première portion imprimée et ladite autre portion imprimée, et toutes lesdites portions imprimées comprises entre lesdites deux limites extérieures sont construites et arrangées de façon qu'elles incluent une partie de ladite couche noire et une partie de ladite seconde couche colorée et une partie de ladite couche réfléchissante et qu'elles incluent deux bords extérieurs respectivement de ladite partie de ladite couche noire et de ladite partie de ladite seconde couche colorée et de ladite partie de ladite couche réfléchissante, et dans lequel lesdits deux bords extérieurs de ladite partie de ladite seconde couche colorée sont situés à l'intérieur desdits deux bords extérieurs de ladite partie de ladite couche noire, et dans lequel la largeur entre lesdits deux bords extérieurs de chacune desdites portions imprimées est inférieure à un centimètre, caractérisé par le fait que dans chacune de ladite pluralité de portions imprimées, ladite partie de ladite couche réfléchissante est située entre ladite partie de ladite seconde couche colorée et ladite partie de ladite couche noire, et lesdits deux bords extérieurs de ladite partie de ladite couche réfléchissante sont espacés vers l'intérieur desdits deux bords extérieurs de ladite partie de ladite couche noire, et dans lequel lesdits deux bords extérieurs de ladite partie de ladite couche réfléchissante sont situés à l'intérieur desdits deux bords extérieurs de ladite partie de ladite seconde couche colorée, et dans lequel la largeur de ladite partie de ladite couche réfléchissante entre lesdits deux bords extérieurs de ladite partie de ladite couche réfléchissante est inférieure à la largeur de ladite partie de ladite seconde couche colorée entre lesdits deux bords extérieurs de ladite partie de ladite seconde couche colorée, et dans lequel ladite seconde couche colorée est transparente ou translucide, et dans au moins une desdites portions imprimées dont lesdits deux bords extérieurs sont espacés vers l'intérieur desdits deux bords extérieurs dudit substrat, la largeur entre lesdits deux bords extérieurs de ladite partie de ladite seconde couche colorée diffère de la largeur de ladite au moins une desdites portions imprimées par au moins 10% de la largeur de ladite partie de ladite seconde couche colorée.

22. Procédé de fabrication d'un panneau comprenant un substrat substantiellement non perforé (14) et un motif imprimé adhérent audit substrat, ledit motif imprimé comprenant une pluralité d'éléments discrets et/ou entourant une pluralité de zones non imprimées dudit substrat, ledit motif imprimé comprenant au moins trois couches superposées, incluant une couche noire (13), une seconde couche colorée (11) comprenant une couche monochrome ou une couche imprimée en quadrichromie, et ledit motif imprimé comprenant en outre une couche blanche (12), et dans lequel une section transver-

sale particulière à travers ledit panneau comprend ledit substrat présentant deux bords extérieurs et ledit motif imprimé comportant des portions imprimées et des portions non imprimées alternées, et dans lequel chaque portion imprimée présente deux bords extérieurs, et dans lequel dans ladite section transversale particulière dudit panneau, ladite seconde couche colorée présente deux limites extérieures, l'une desdites deux limites extérieures étant située sur une première desdites portions imprimées et l'autre desdites deux limites extérieures étant située sur une autre desdites portions imprimées, une pluralité de portions imprimées se trouvant entre ladite première portion imprimée et ladite autre portion imprimée, et toutes lesdites portions imprimées comprises entre lesdites deux limites extérieures sont construites et arrangées de façon qu'elles incluent une partie de ladite couche noire et une partie de ladite seconde couche colorée et une partie de ladite couche blanche et qu'elles incluent deux bords extérieurs respectivement de ladite partie de ladite couche noire et de ladite partie de ladite seconde couche colorée et de ladite partie de ladite couche blanche, et dans lequel lesdits deux bords extérieurs de ladite partie de ladite seconde couche colorée sont situés à l'intérieur desdits deux bords extérieurs de ladite partie de ladite couche noire, et dans lequel la largeur entre lesdits deux bords extérieurs de chacune desdites portions imprimées est inférieure à un centimètre, caractérisé par le fait que dans chacune de ladite pluralité de portions imprimées, ladite partie de ladite couche blanche est située entre ladite partie de ladite seconde couche colorée et ladite partie de ladite couche noire, et lesdits deux bords extérieurs de ladite partie de ladite couche blanche sont espacés l'intérieur desdits deux bords extérieurs de ladite partie de ladite couche noire, et dans lequel lesdits deux bords extérieurs de ladite partie de ladite couche blanche sont situés à l'intérieur desdits deux bords extérieurs de ladite partie de ladite seconde couche colorée, et dans lequel la largeur de ladite partie de ladite couche blanche entre lesdits deux bords extérieurs de ladite partie de ladite couche blanche est inférieure à la largeur de ladite partie de ladite seconde couche colorée entre lesdits deux bords extérieurs de ladite partie de ladite seconde couche colorée, et dans lequel ladite seconde couche colorée est transparente ou translucide, ledit procédé comprenant le fait d'imprimer ladite seconde couche colorée dans chacune desdites portions imprimées comprises entre lesdites deux limites extérieures de ladite seconde couche colorée par application d'au moins une partie d'une largeur présentée de ladite seconde couche colorée dans chacune desdites portions imprimées, où ladite largeur présentée de ladite seconde couche colorée adhère seulement à chacune desdites portions imprimées, et où dans au moins une desdites portions imprimées dont lesdits deux bords sont espacés vers l'intérieur desdits deux bords extérieurs dudit substrat, ladite largeur présentée de ladite partie de ladite seconde couche colorée diffère de la largeur de ladite au moins une desdites portions imprimées par au moins 10% de la largeur de ladite partie de ladite seconde couche colorée.

5

10

15

20

25

30

35

40

45

50

55

mées, et où dans au moins une desdites portions imprimées dont lesdits deux bords sont espacés vers l'intérieur desdits deux bords extérieurs dudit substrat, ladite largeur présentée de ladite partie de ladite seconde couche colorée diffère de la largeur de ladite au moins une desdites portions imprimées par au moins 10% de la largeur de ladite partie de ladite seconde couche colorée.

23. Procédé selon la revendication 22, dans lequel ladite couche noire est hydrophile.

24. Procédé selon la revendication 22 ou 23, dans lequel ladite couche blanche est hydrophile.

25. Procédé selon l'une quelconque des revendications 22 à 24, dans lequel la surface dudit substrat dans lesdites portions non imprimées est hydrophobe.

26. Procédé selon l'une quelconque des revendications 22 à 25, dans lequel ledit procédé d'impression en quadrichromie est un procédé d'impression numérique.

27. Procédé selon l'une quelconque des revendications 22 à 26, dans lequel ladite seconde couche colorée comprend une résine pigmentée à transfert thermique.

28. Procédé selon l'une quelconque des revendications 22 à 27, dans lequel lesdits deux bords extérieurs de ladite partie de ladite seconde couche colorée coïncident avec lesdits deux bords extérieurs de ladite partie de ladite couche noire.

29. Procédé de fabrication d'un panneau selon la revendication 22, dans lequel ledit substrat est transparent et ledit motif imprimé comprend un motif de traits opaques, ladite seconde couche colorée est imprimée par une machine d'impression numérique comprenant un dispositif d'analyse optique, et ledit substrat est passé à travers ladite machine d'impression numérique dans une direction perpendiculaire aux dits traits opaques, et ledit dispositif d'analyse optique identifie les bords avant et arrière desdits traits opaques et ordonne à ladite machine d'impression numérique d'imprimer sur lesdits traits opaques mais pas sur lesdites zones transparentes dudit substrat comprises entre lesdits traits opaques.

30. Procédé de fabrication d'un panneau selon la revendication 22, dans lequel on imprime ladite couche noire sur ledit substrat sous la forme dudit motif imprimé, on imprime ladite couche blanche sur ladite couche noire, et on applique ladite seconde couche colorée sur ledit substrat entre lesdites deux limites extérieures, et ladite seconde couche

- colorée adhère à ladite pluralité de portions imprimées comprises entre lesdites deux limites extérieures et n'adhère pas audit substrat dans lesdites portions non imprimées comprises entre lesdites deux limites extérieures.
31. Procédé selon la revendication 30, dans lequel ladite seconde couche colorée comprend une résine pigmentée à transfert thermique se transférant sur ladite pluralité de portions imprimées mais pas sur lesdites portions non imprimées. 10
32. Procédé selon la revendication 30, dans lequel ladite seconde couche colorée comprend une encre qui adhère à ladite pluralité de portions imprimées et sèche dessus, mais n'adhère pas aux dites portions non imprimées ou ne sèche pas dessus. 15
33. Procédé selon la revendication 22, dans lequel on imprime ladite seconde couche colorée par jet d'encre. 20
34. Procédé selon la revendication 22, dans lequel ladite seconde couche colorée comprend une matière électrographique impressionnée transférée d'un support de transfert audit motif imprimé. 25
35. Procédé selon la revendication 22, dans lequel dans chacune de ladite pluralité de portions imprimées, on applique une couche de matière claire sur la couche de fond blanche, ladite couche de matière claire pouvant retenir ladite seconde couche colorée, et on applique ladite seconde couche colorée sur ladite couche de matière claire. 30
36. Procédé selon la revendication 22, ledit substrat comprenant une feuille de matière transparente; et comprenant le fait d'imprimer ladite couche noire et ladite couche blanche dudit motif imprimé sur des zones choisies de ladite matière transparente, et d'ordonner à une machine d'impression numérique d'imprimer ladite seconde couche colorée sur des portions choisies desdites zones choisies imprimées. 35
37. Procédé selon la revendication 36, comprenant en outre le fait d'analyser ladite feuille de matière transparente et lesdites zones choisies imprimées dessus afin d'identifier des bords avant et arrière desdites zones choisies imprimées, et dans lequel ledit ordre est basé sur lesdits bords avant et bords arrière identifiés desdites zones choisies imprimées. 40
38. Procédé selon la revendication 37, comprenant en outre le fait d'ordonner à ladite machine d'impression numérique de n'imprimer sur aucune des zones non imprimées de ladite matière transparente. 45
39. Procédé selon la revendication 36, dans lequel ledit motif imprimé comprend une pluralité de traits. 50
40. Procédé selon la revendication 36, dans lequel ledit motif imprimé est opaque. 55
41. Procédé selon la revendication 39, dans lequel ladite matière transparente est avancée pour l'impression par ladite machine d'impression numérique dans une direction perpendiculaire aux dits traits.
42. Procédé selon la revendication 36, dans lequel ladite machine d'impression numérique est une machine numérique d'impression par transfert thermique.
43. Procédé selon la revendication 36, dans lequel ladite machine d'impression numérique est une machine numérique d'impression par jet d'encre.
44. Procédé selon la revendication 36, dans lequel ladite machine d'impression numérique utilise un processeur d'image tramée qui détermine les positions et dimensions de dépôts de matières à marquer en noir, cyan, magenta et jaune dans un procédé d'impression en quadrichromie pour former ladite couche superposée.

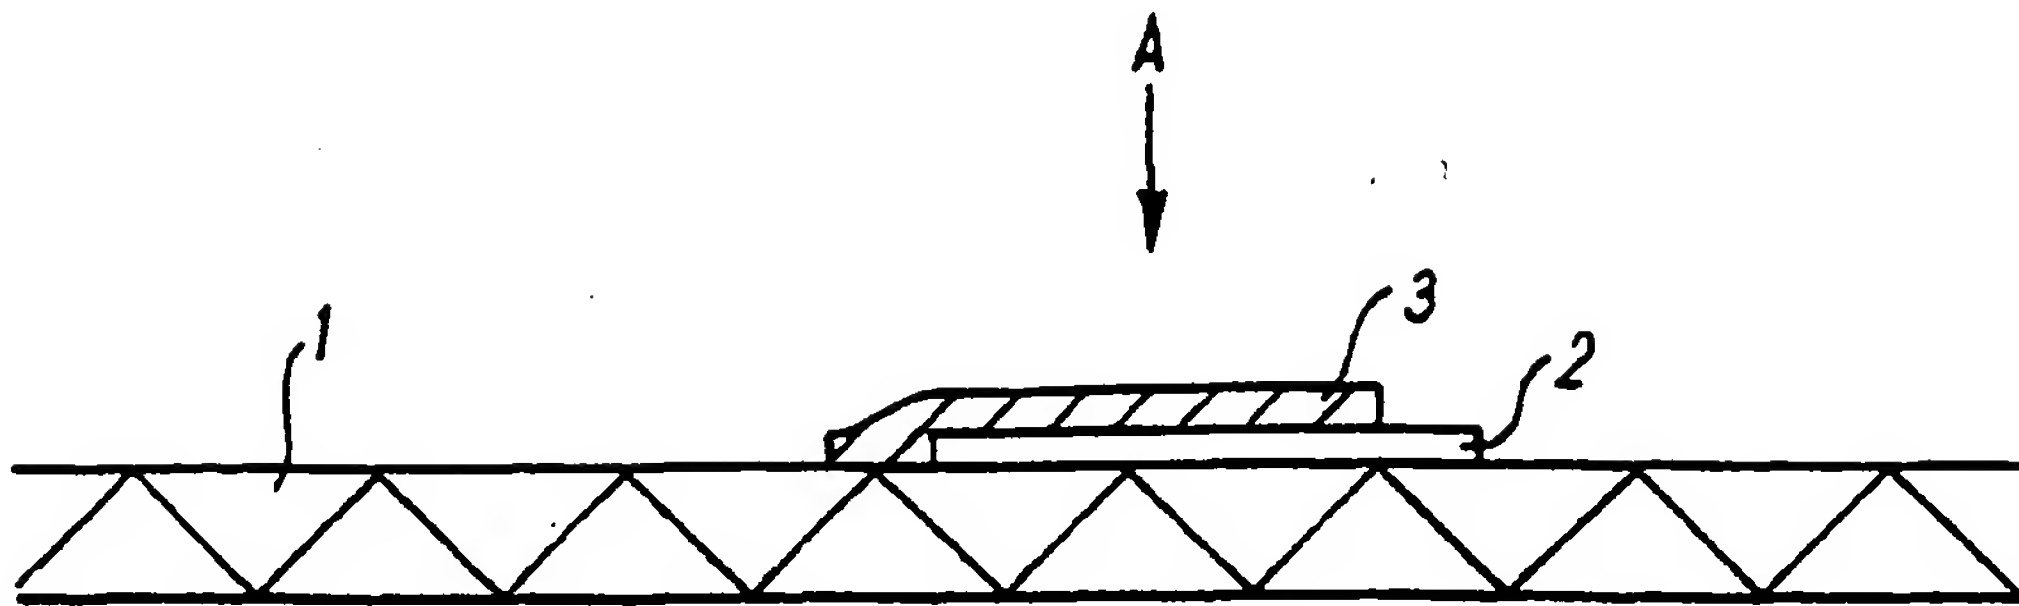


Fig. 1

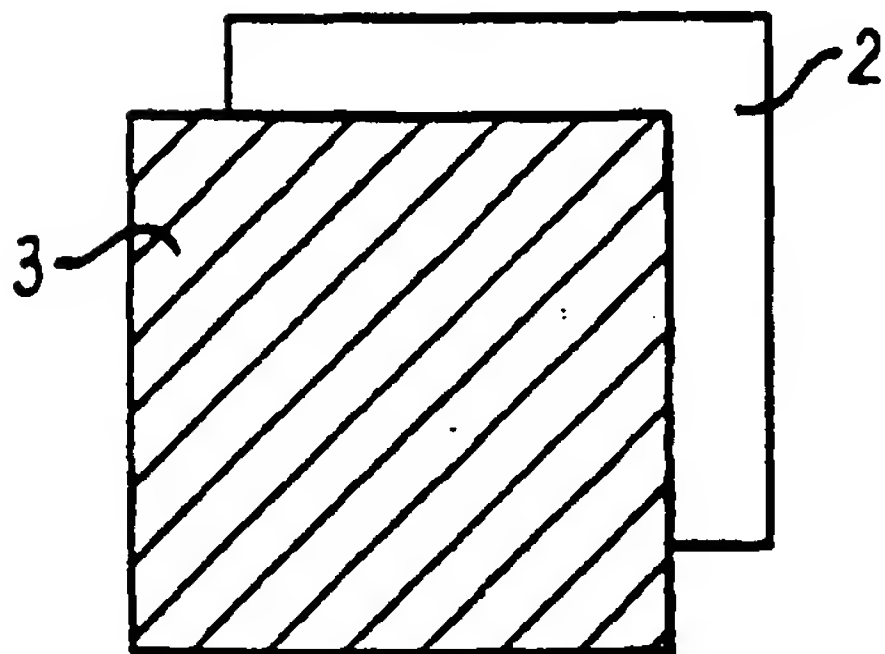


Fig. 1A

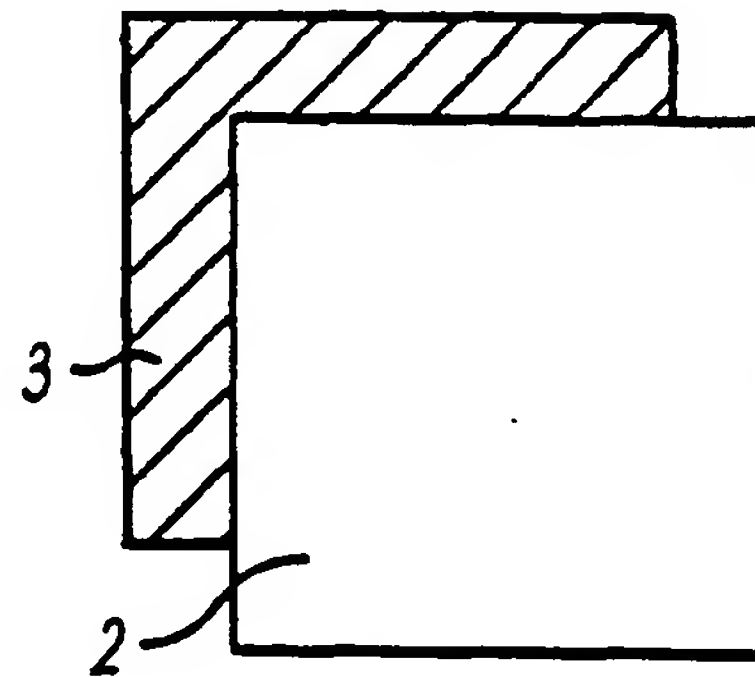
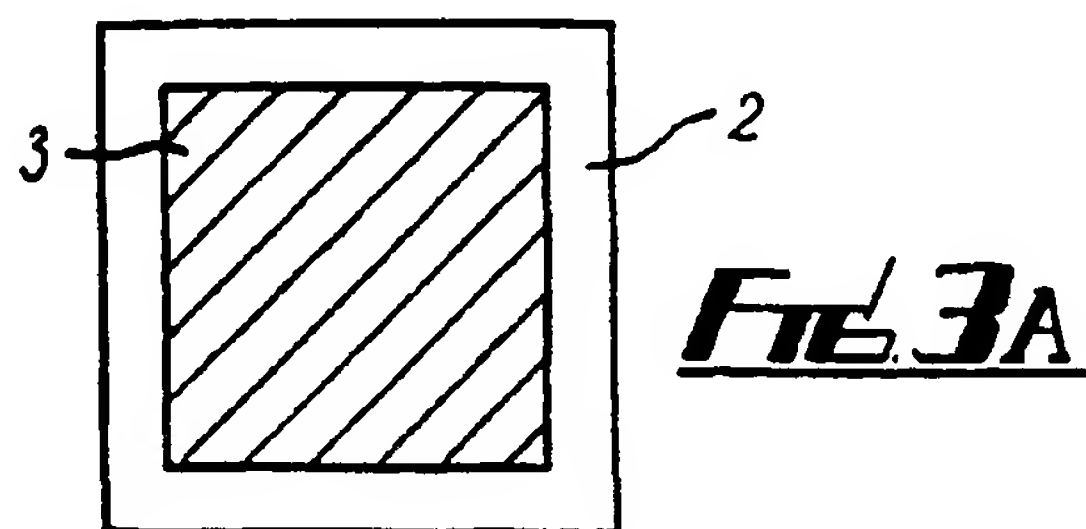
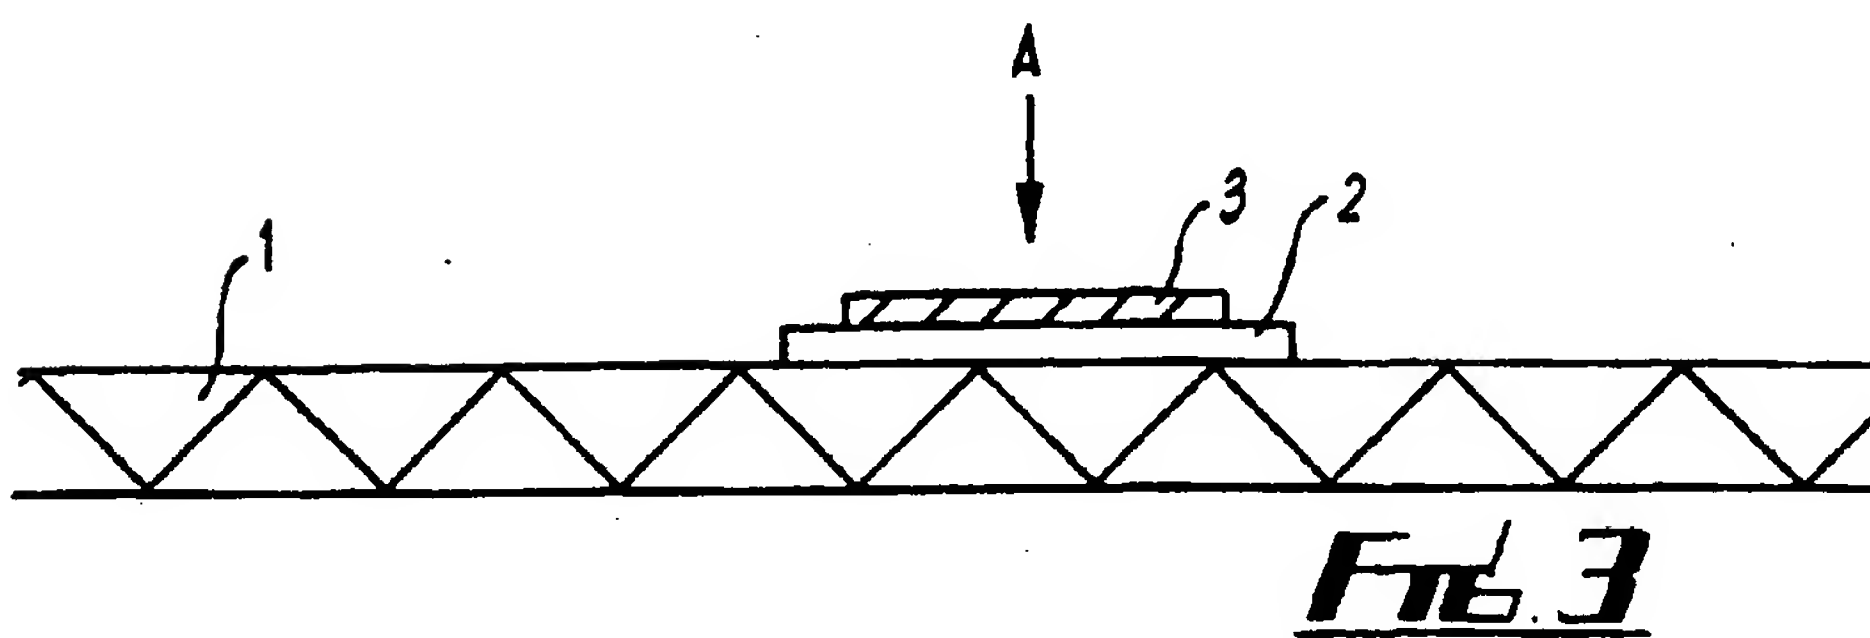
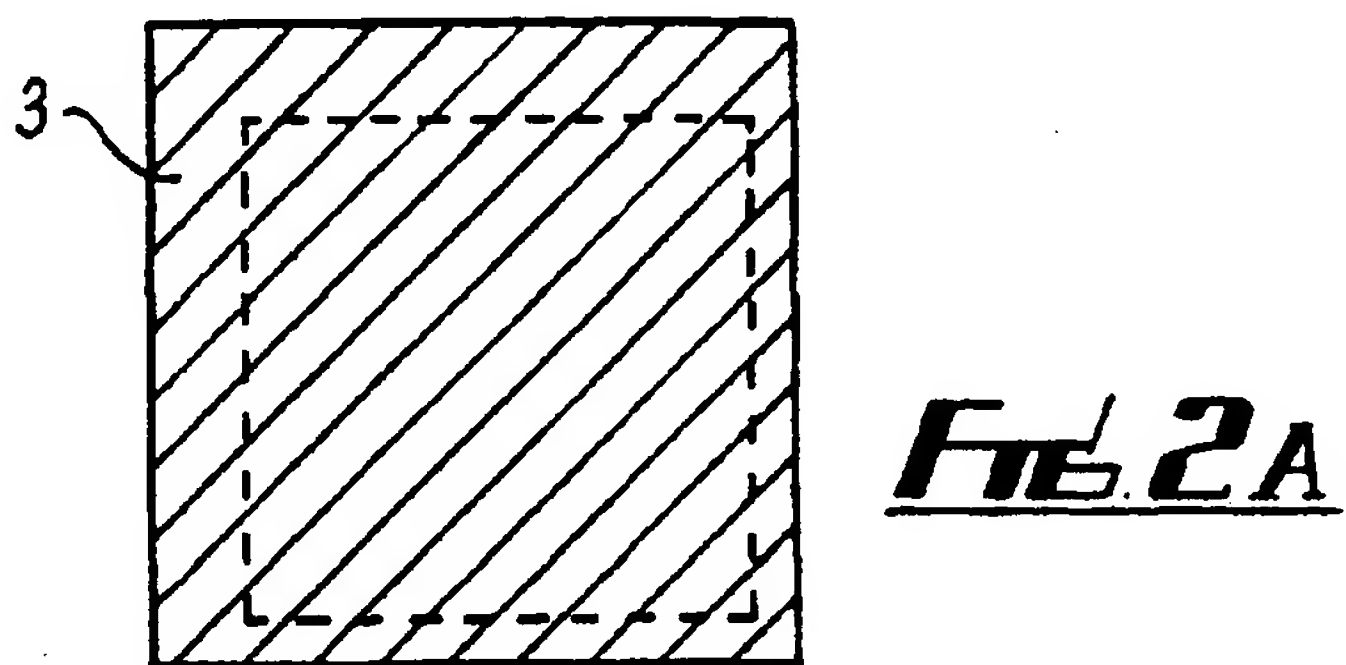
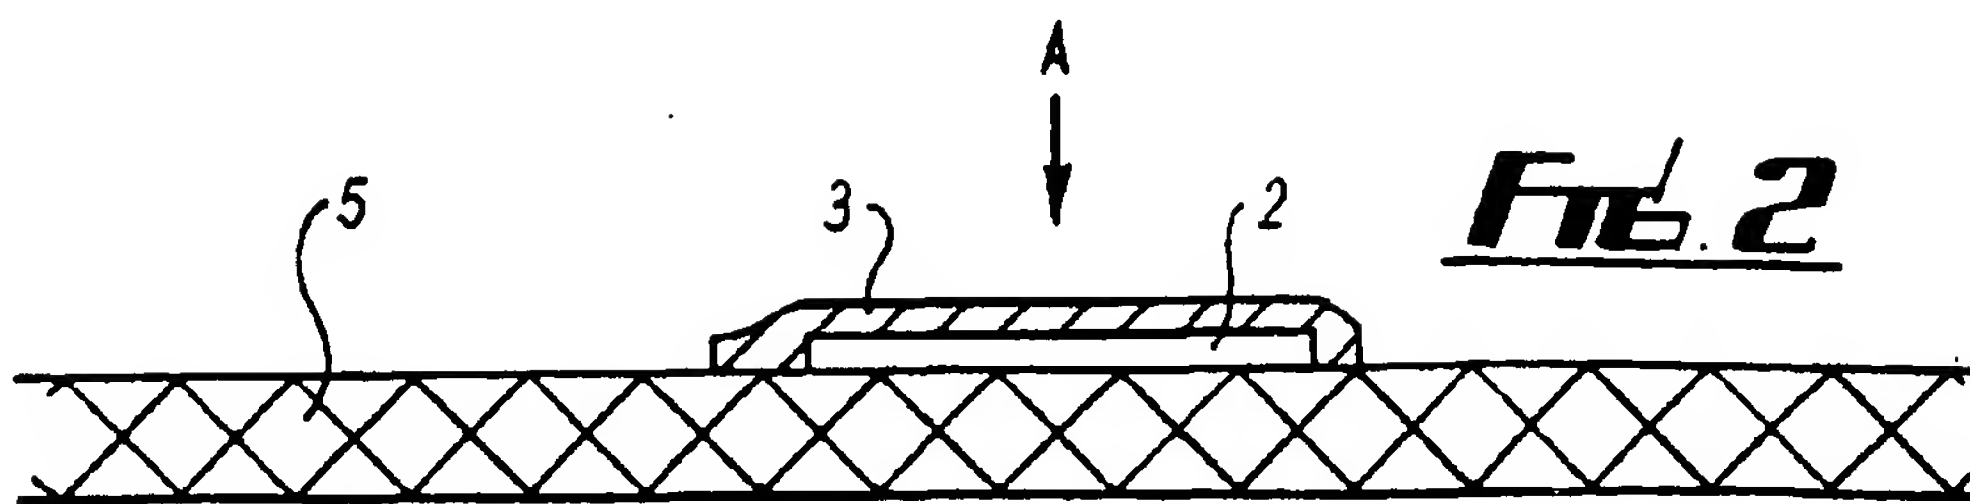


Fig. 1B



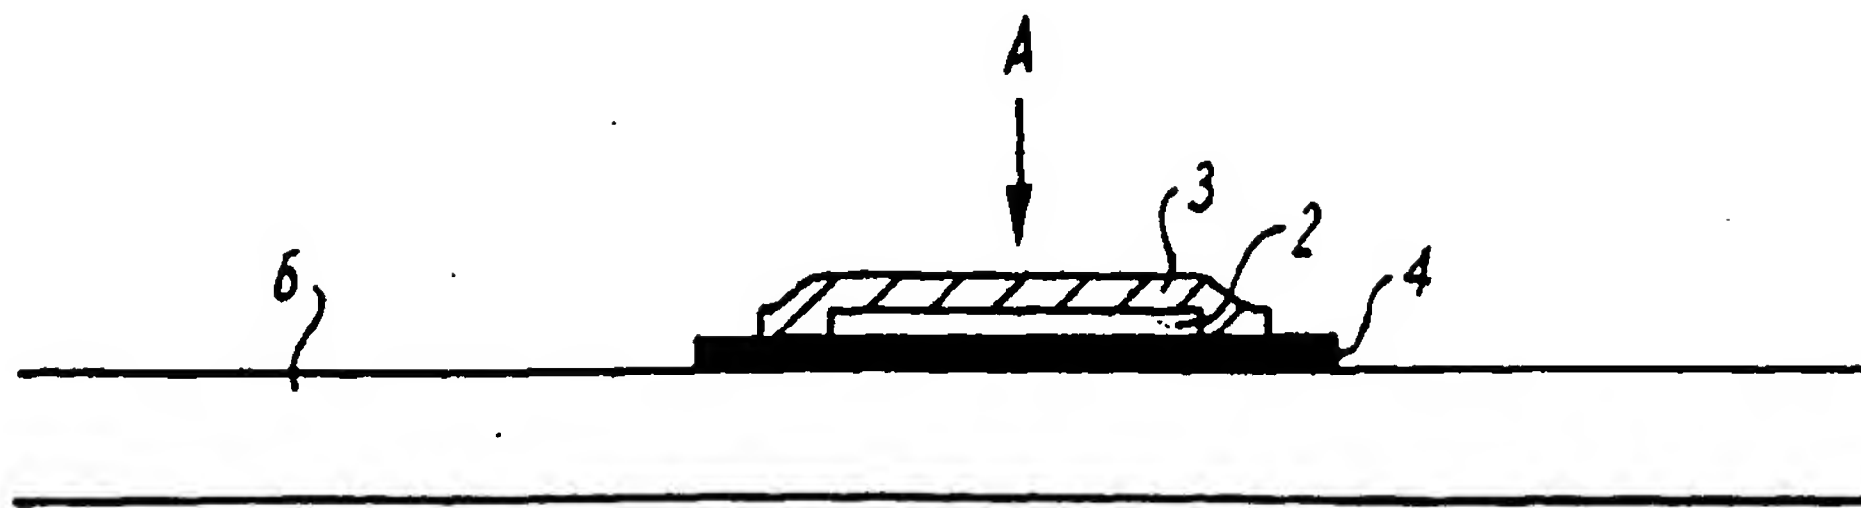


FIG. 4

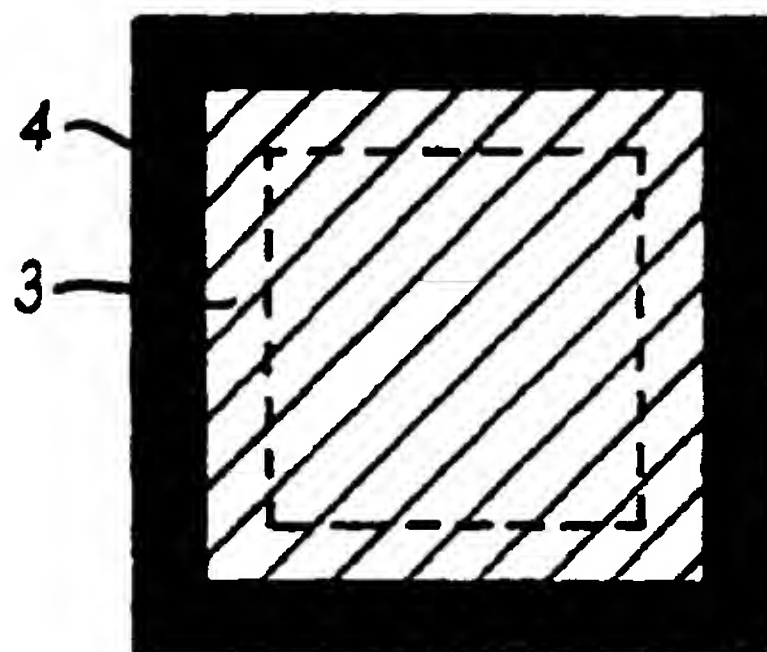


FIG. 4A

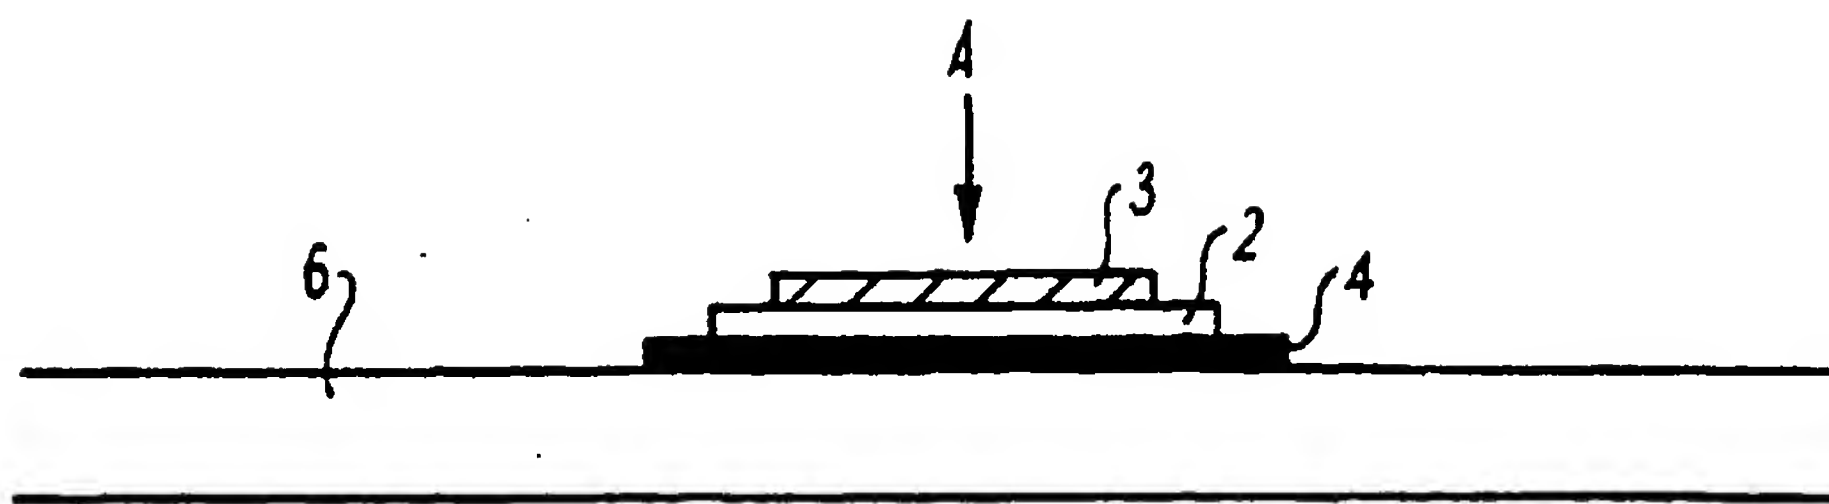


FIG. 5

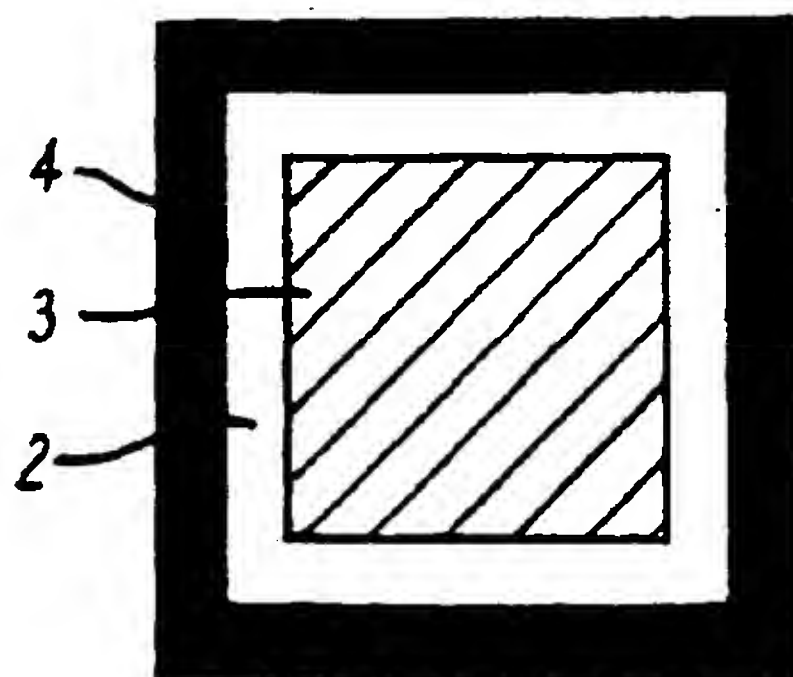
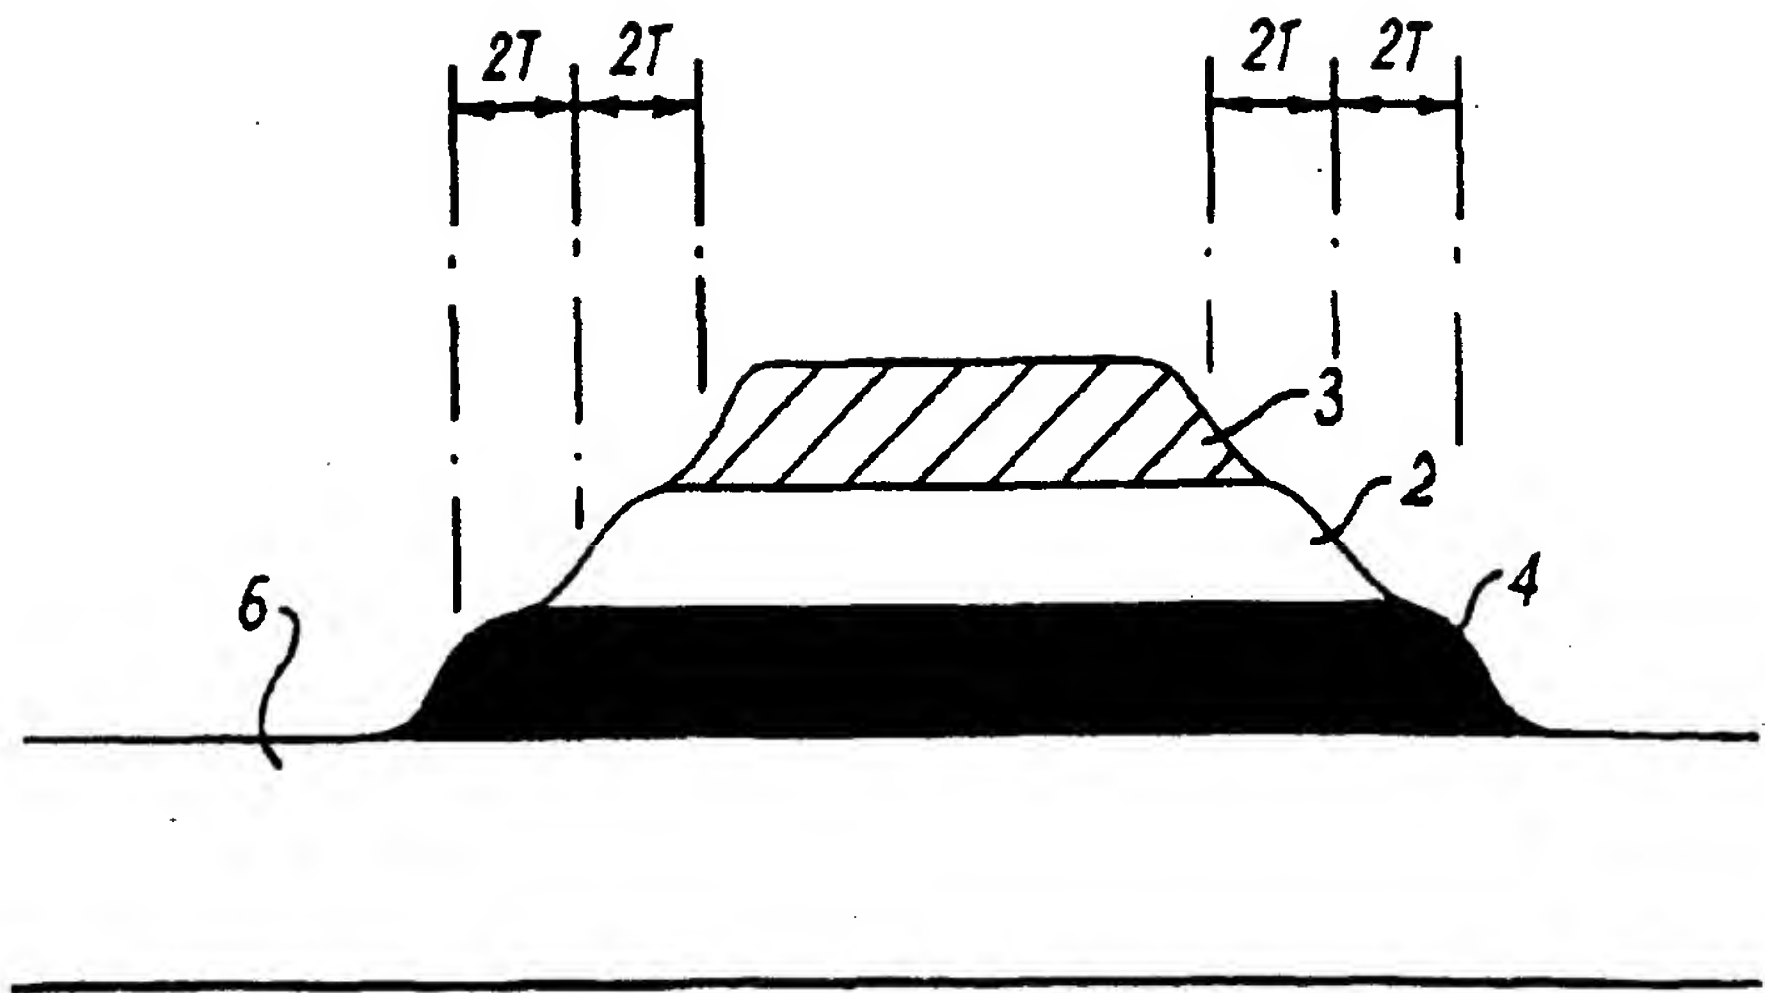
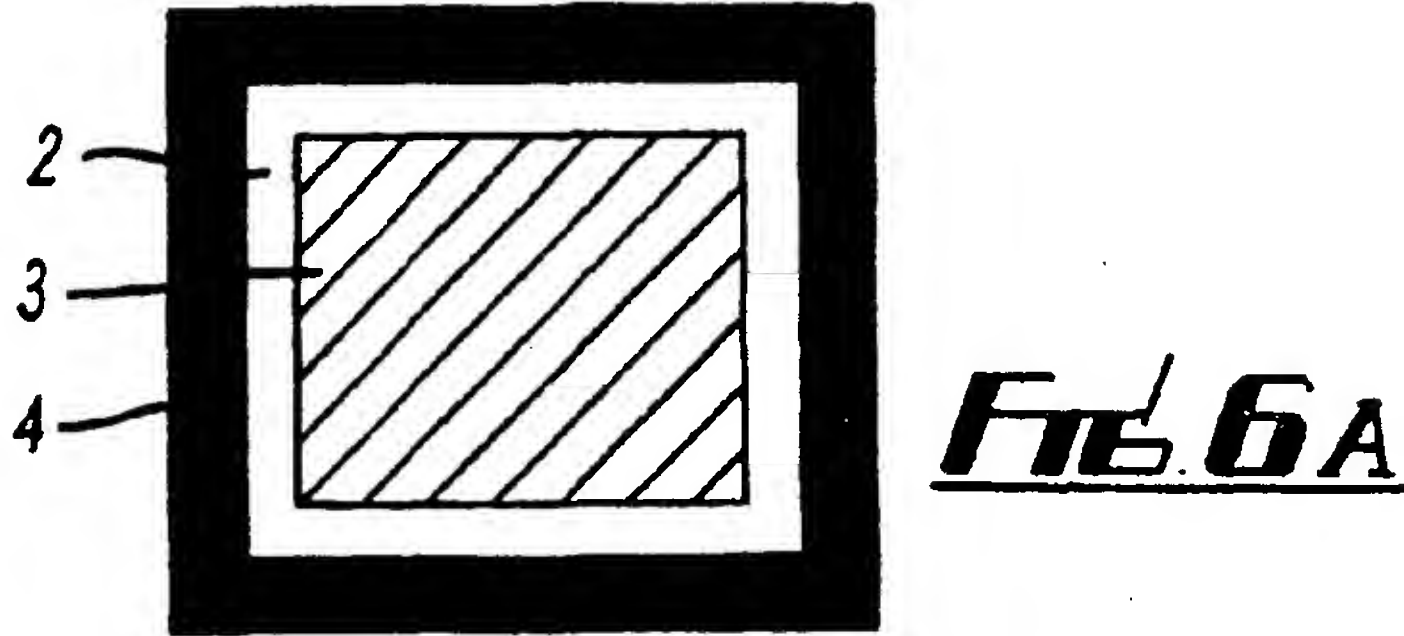
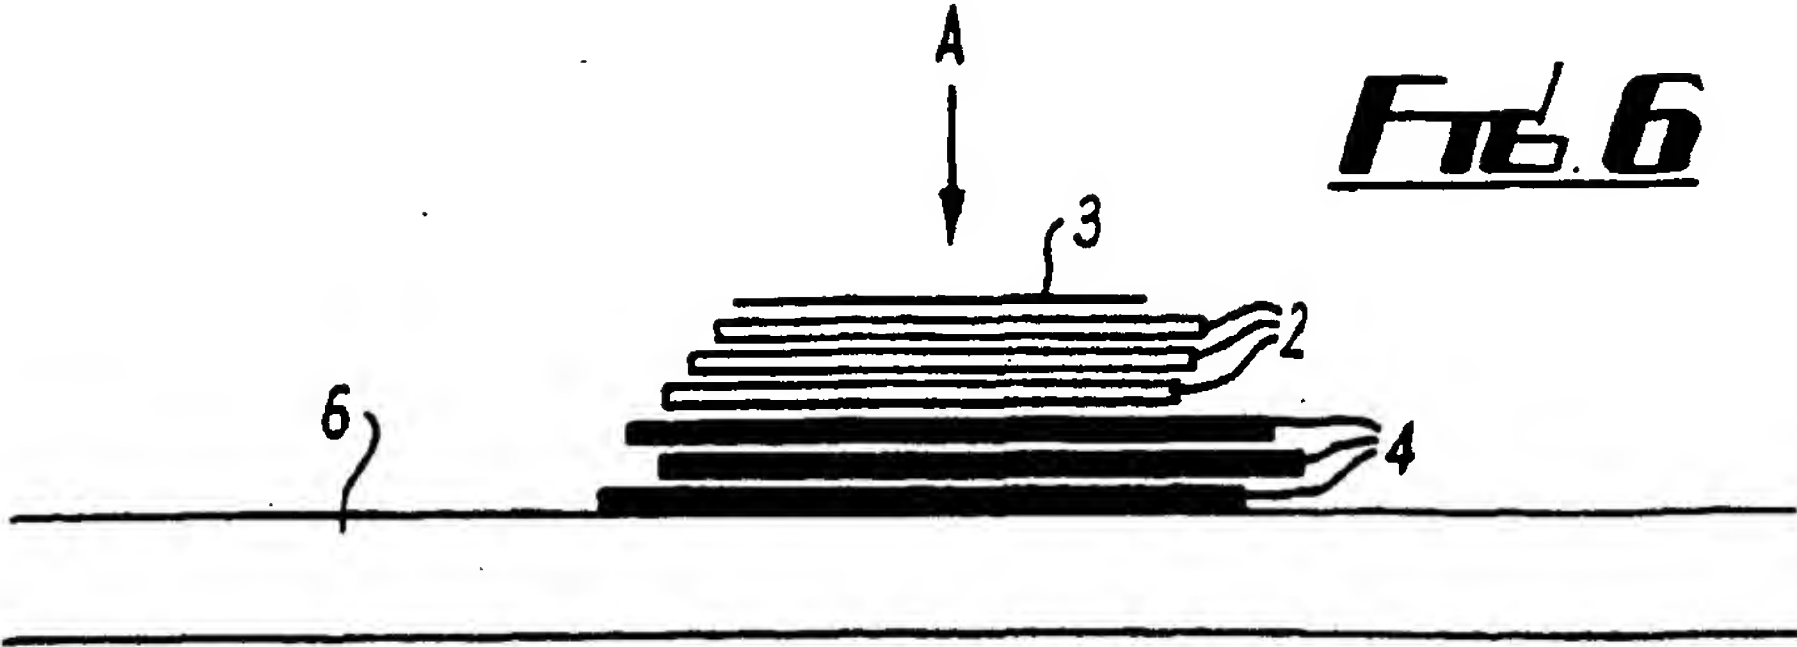


FIG. 5A



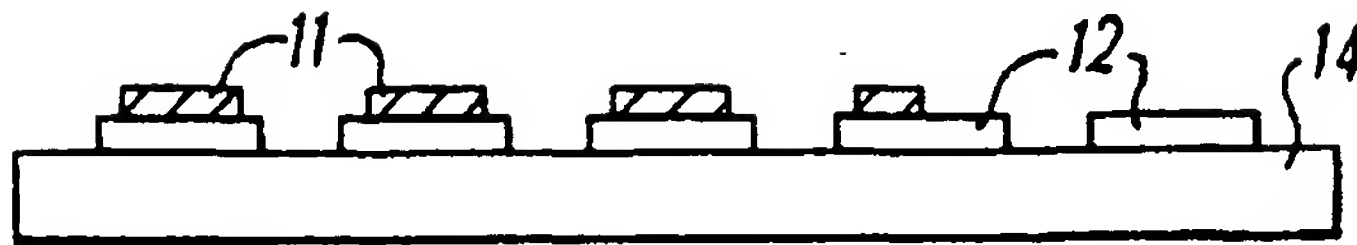


Fig. 8A

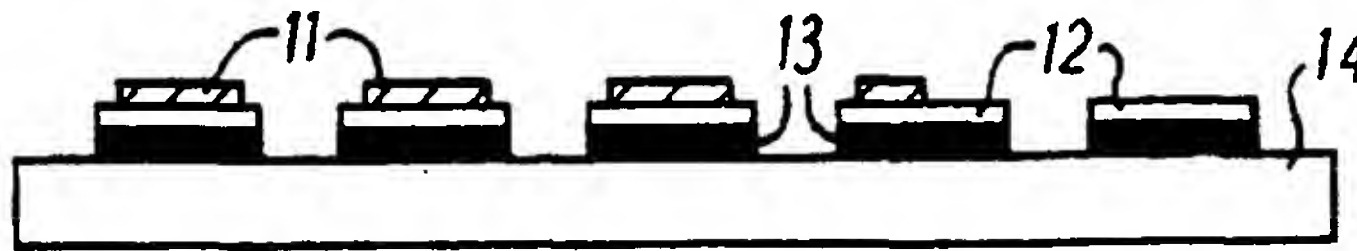


Fig. 8B

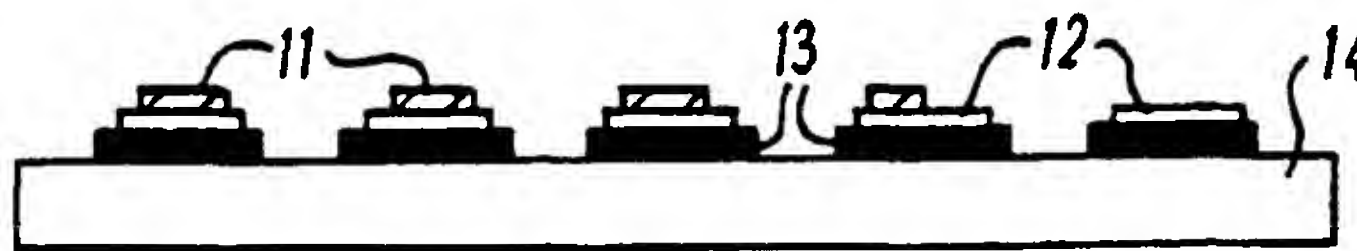


Fig. 8C

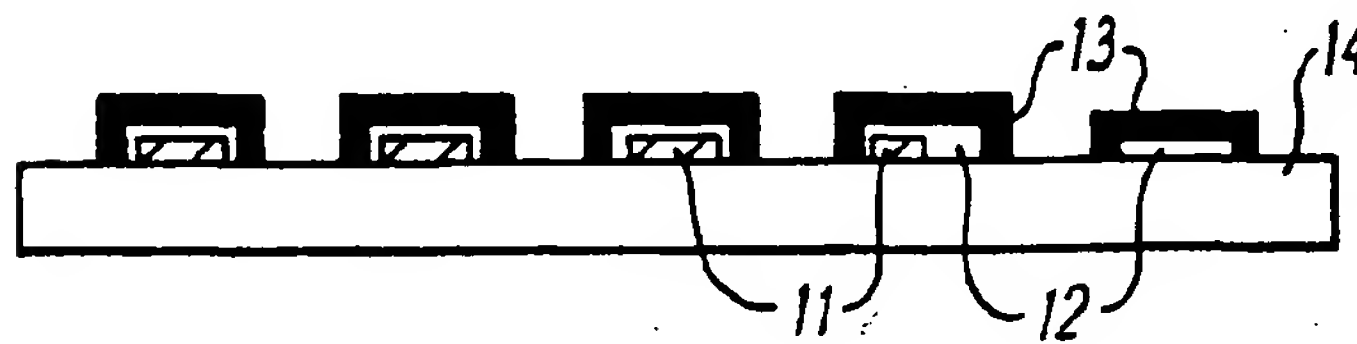


Fig. 8D

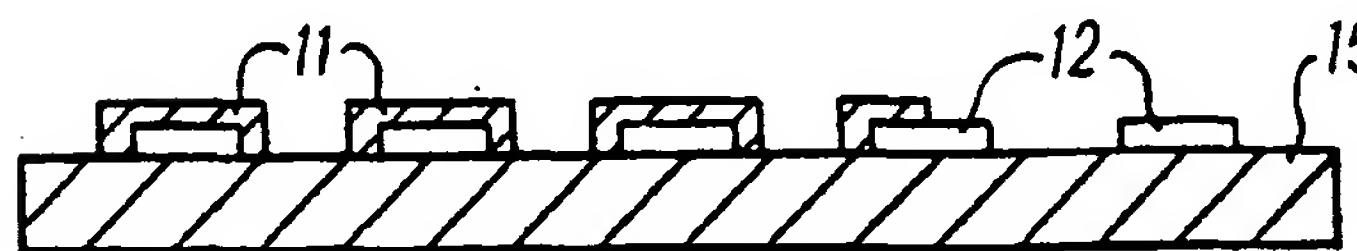


Fig. 9A

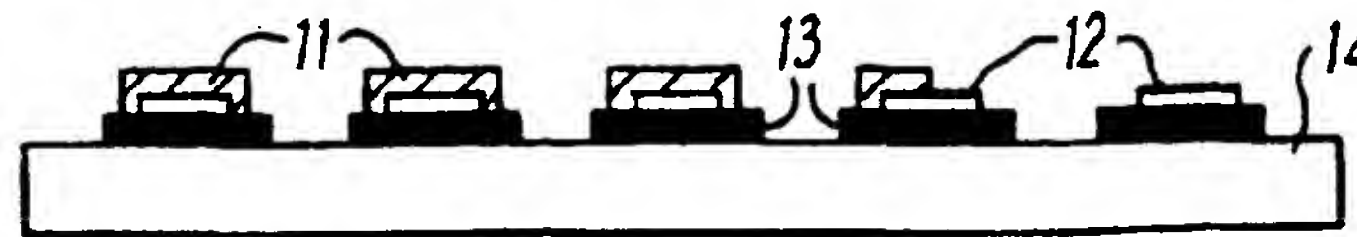


Fig. 9B

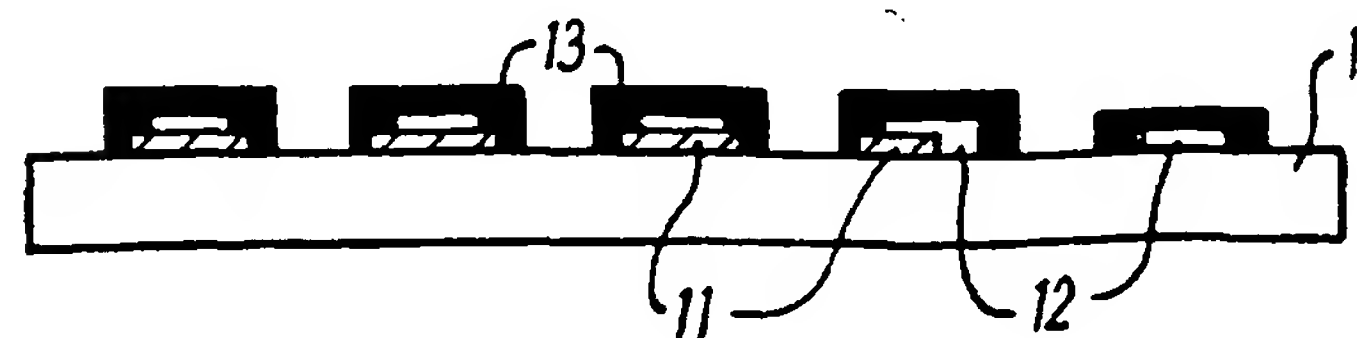


Fig. 9C

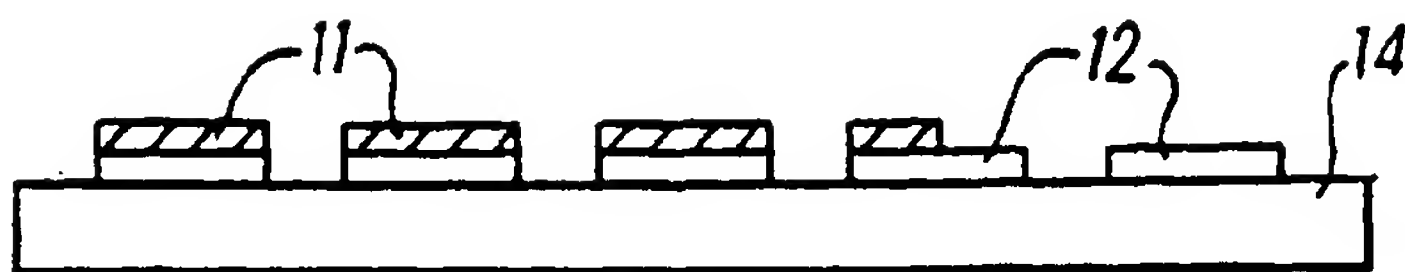


FIG. 10A

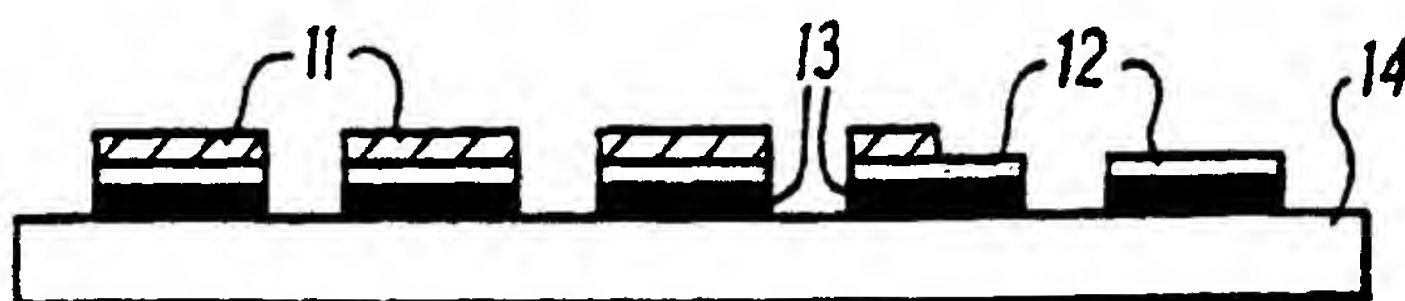


FIG. 10B

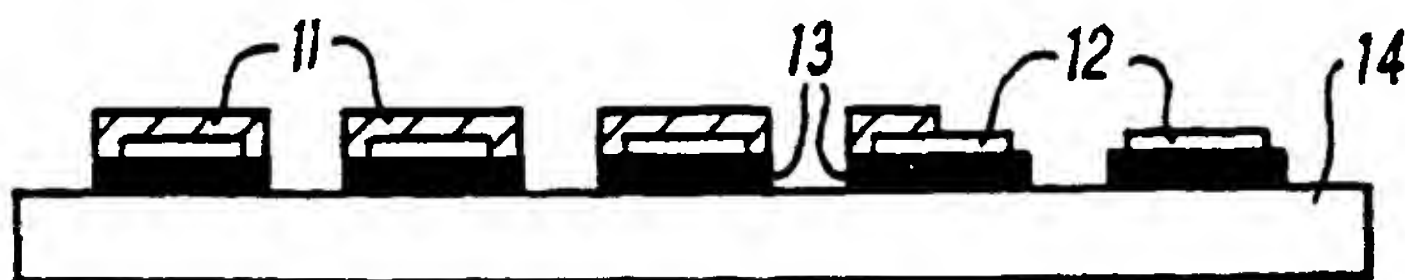


FIG. 10C

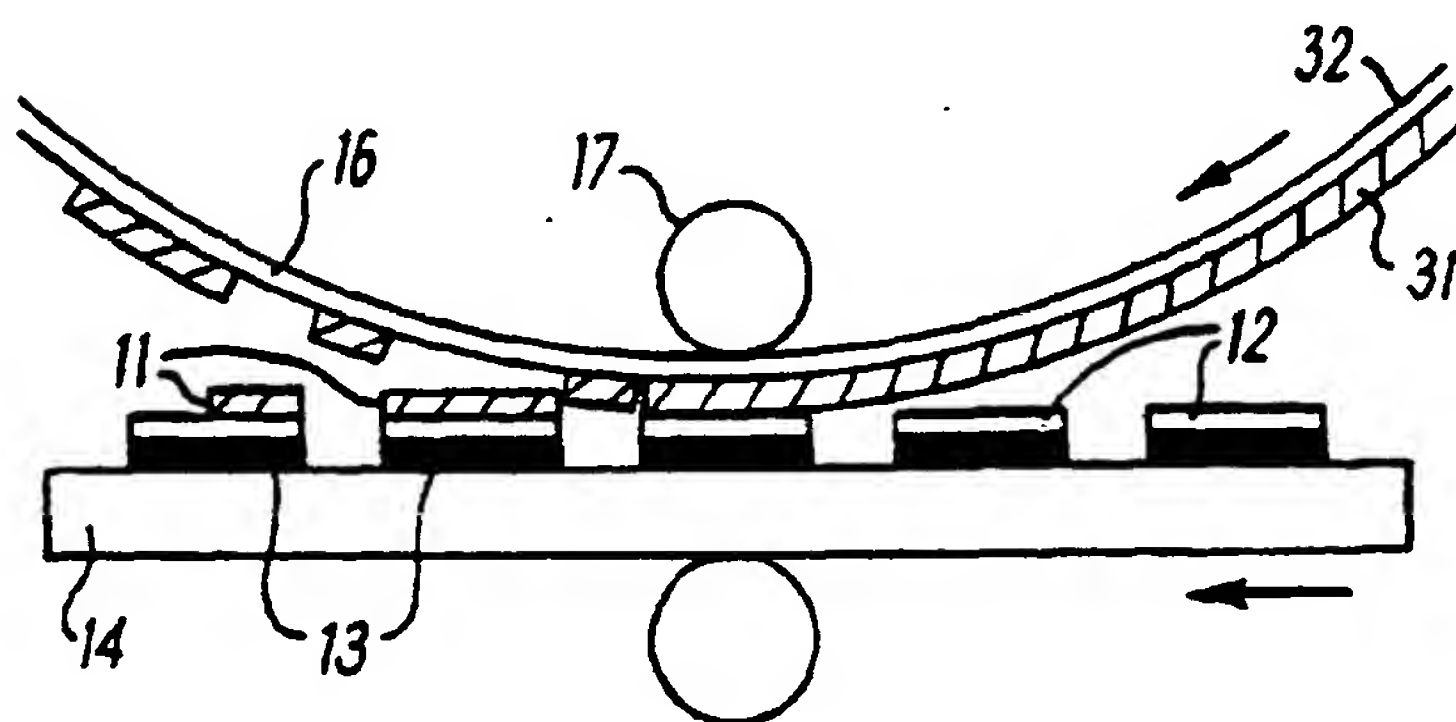


FIG. 11

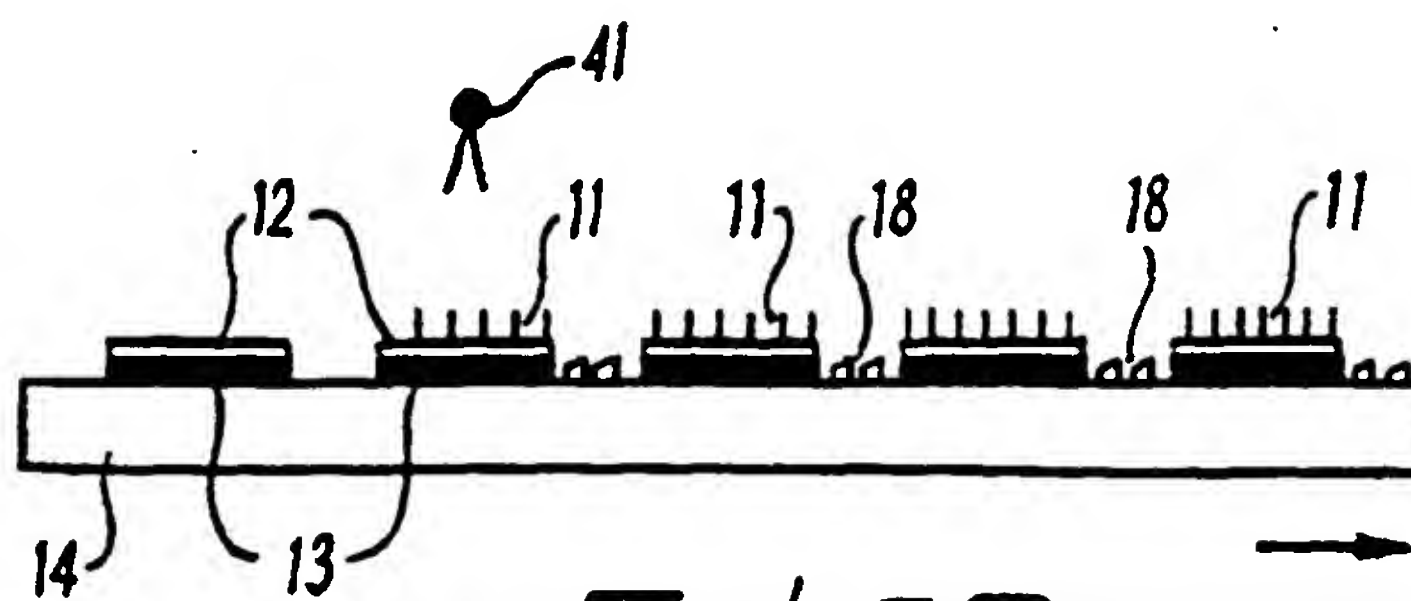


Fig. 12A

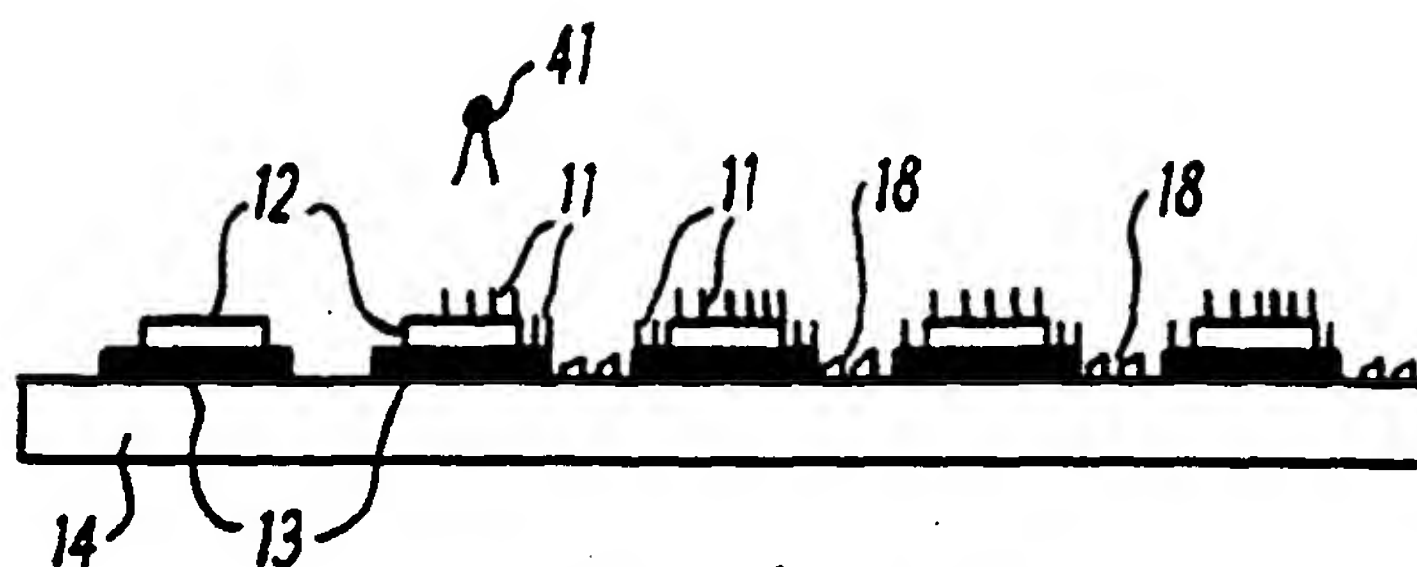


Fig. 12B

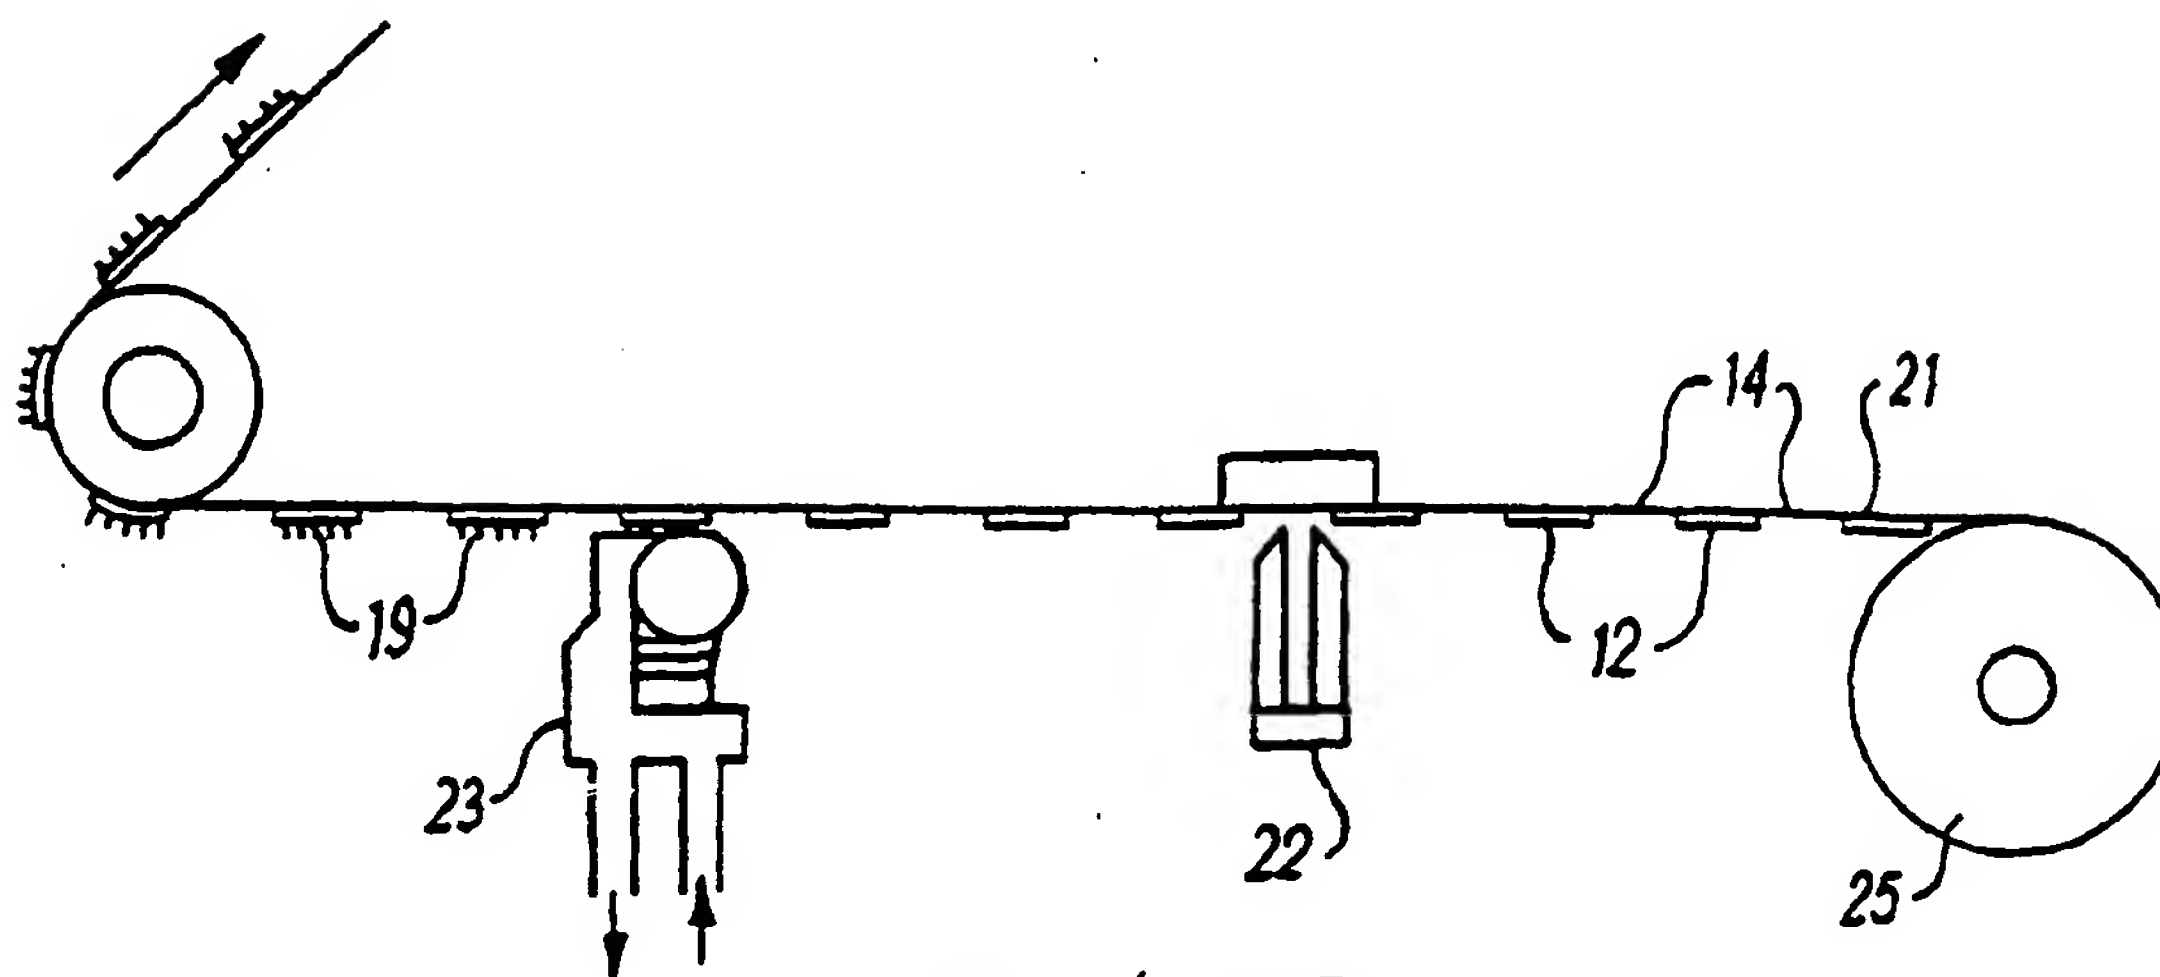


Fig. 13

THIS PAGE BLANK (USPTO)